


CANNA BARS 6

FULLY OPTIMIZED &
AUTOMATED
PROCESSES WITH THE BEST
FLEXIBILITY & EFFICIENCY

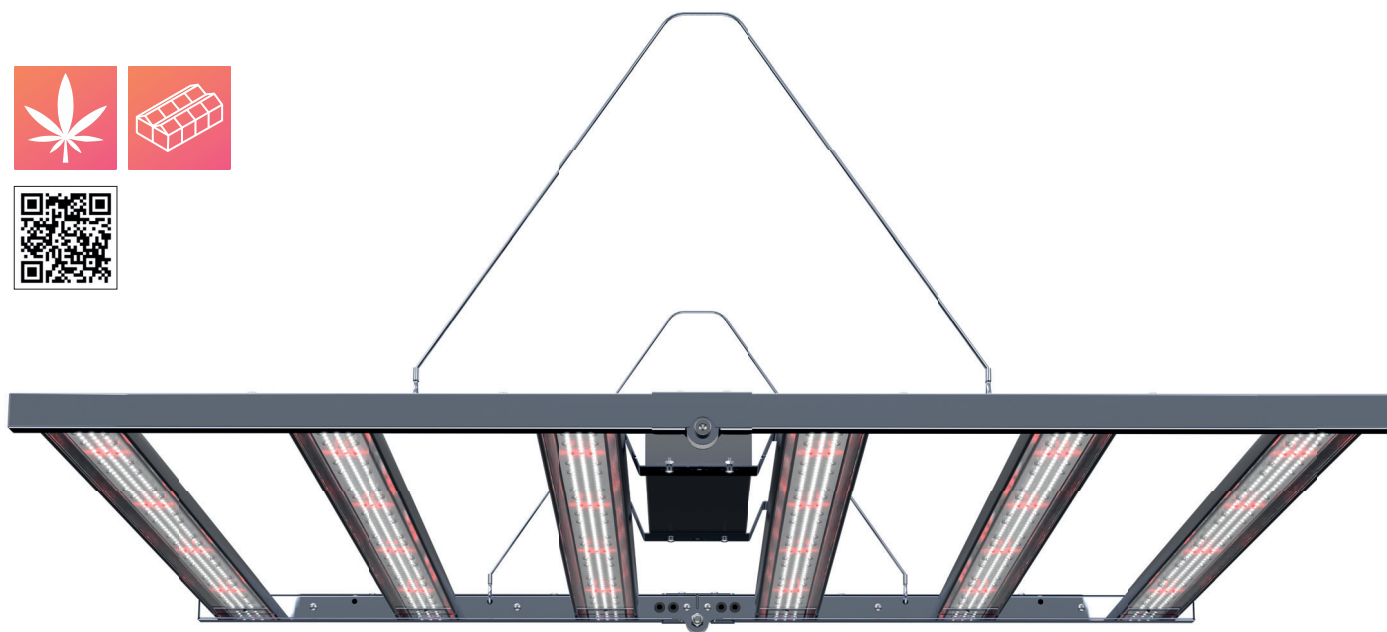

A REAL SUPERHERO MEMBER OF GROWLIGHT FAMILY.

TOPLIGHT segment aims general lighting range for greenhouses via ceiling mount. Stable, long life solution with high IP&IK levels. Suits for all greenhouse facilities. Controllable, east to mount, automation ready, flexible spectrum on request GROWLIGHT solution. Expanding options with special body design.





A better way to see!


ELECTROMECHANIC SPECIFICATIONS

Voltage	108-305 AC 50-60Hz
Watt	660W (220V AC)
Amps at 220V	3 A
Max Ambient temp	40°
Power factor (cosØ)	0.99
Power connection	Standart 40cm cable, IP66 socket (optional)
Dim	0-10V or PWM (optional)
Weight	12,5 kg

SPECTRUM

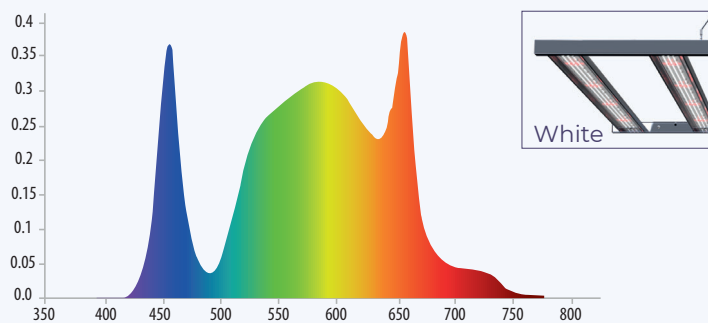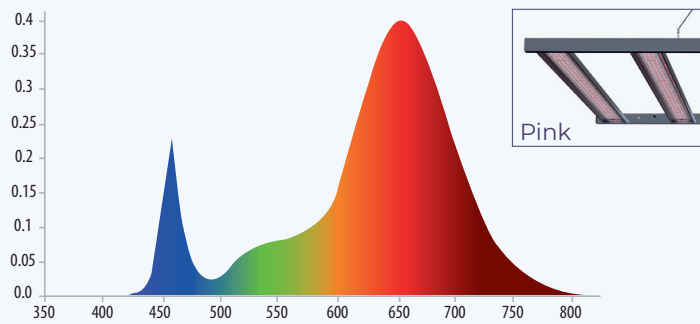

DIMENSIONS

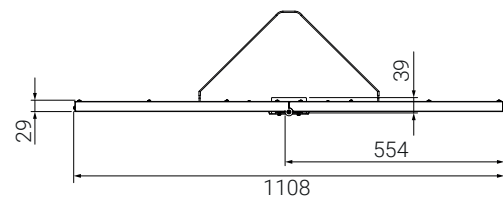

	1	2	3	4	5	
A	400	417	420	409	401	Test Area: 1,5mx1,5m Height to Test Point: 1,5m Canopy Average PPFD 400 µmol 1.2mx1.2m
B	421	439	446	437	421	
C	418	439	448	437	421	
D	402	425	434	422	405	
E	345	349	348	339	323	

30cm
30cm

	1	2	3	4	5	
A	451	496	512	481	439	Test Area: 1,5mx1,5m Height to Test Point: 1m Canopy Average PPFD 500 µmol 1.2mx1.2m
B	466	513	532	503	452	
C	461	509	528	497	445	
D	424	470	486	460	411	
E	381	418	433	412	368	

30cm
30cm

	1	2	3	4	5	
A	374	558	606	525	363	Test Area: 1,5mx1,5m Height to Test Point: 0,5m Canopy Average PPFD 650 µmol 1.2mx1.2m
B	439	648	720	612	379	
C	461	681	754	627	388	
D	402	584	665	558	343	
E	305	430	479	407	263	

30cm
30cm



*Legal disclaimer – Fiberli LED grow lights for cannabis production are only sold to geographical territories where the growth of cannabis is legalized by local laws.