

GÜNNAY

FULLY OPTIMIZED &
AUTOMATED
PROCESSES WITH
THE BEST
FLEXIBILITY & EFFICIENCY



A REAL SUPERHERO MEMBER OF GROWLIGHT FAMILY.

Powerful option of Growlight family. TOPLIGHT segment aims general lighting range for greenhouses via ceiling mount. Suits for all greenhouse facilities. Controllable, easy to mount, automation ready, flexible spectrum on request GROWLIGHT solution.





A better way to see!



ELECTROMECHANIC SPECIFICATIONS

Voltage	108-305 AC 50-60Hz
Watt	600-720W (220V AC)
Amps at 220V	3 A
Max Ambient temp	-30° +50°
Power factor (cosØ)	>0.95
Power connection	Standart 40cm cable, IP66 socket (optional)
Dim	0-10V or PWM (optional)
Weight	10 kg

SPECTRUM

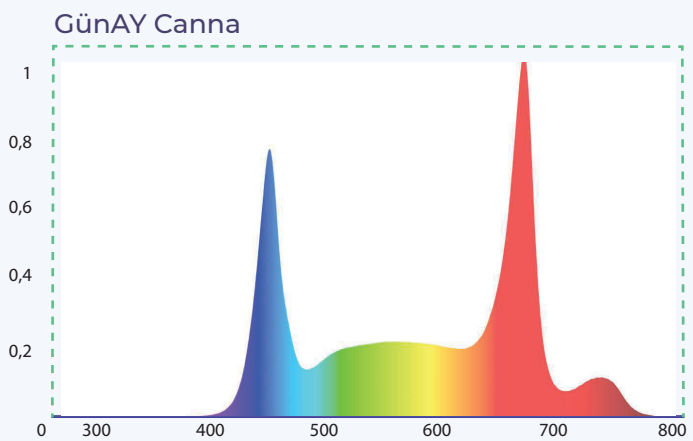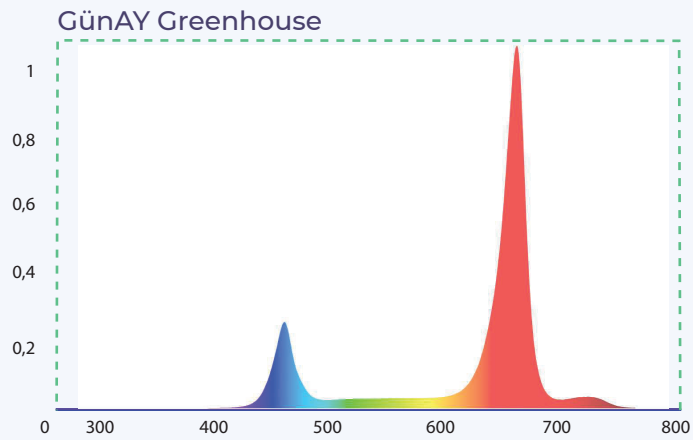

DIMENSIONS

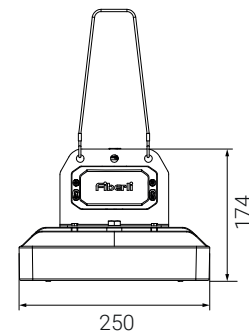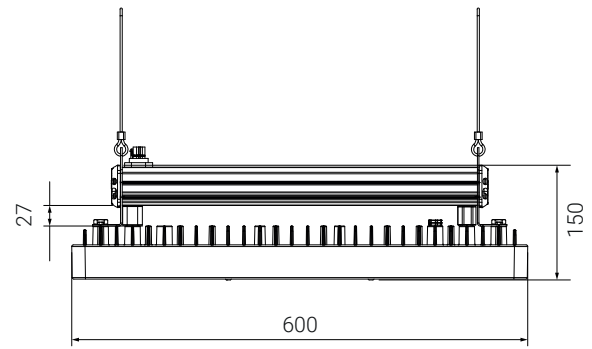

*Legal disclaimer – Fiberli LED grow lights for cannabis production are only sold to geographical territories where the growth of cannabis is legalized by local laws.