Cordoba

Park&Bahçe&Sokak Aydınlatması | Dekoratif Seri

Park&Garden&Street Lighting | Decorative Series

Cordoba

Park&Bahçe&Sokak Aydınlatması | Dekoratif Seri

Park&Garden&Street Lighting | Decorative Series

Cordoba

Park&Bahçe&Sokak Aydınlatması | Dekoratif Seri

Park&Garden&Street Lighting | Decorative Series

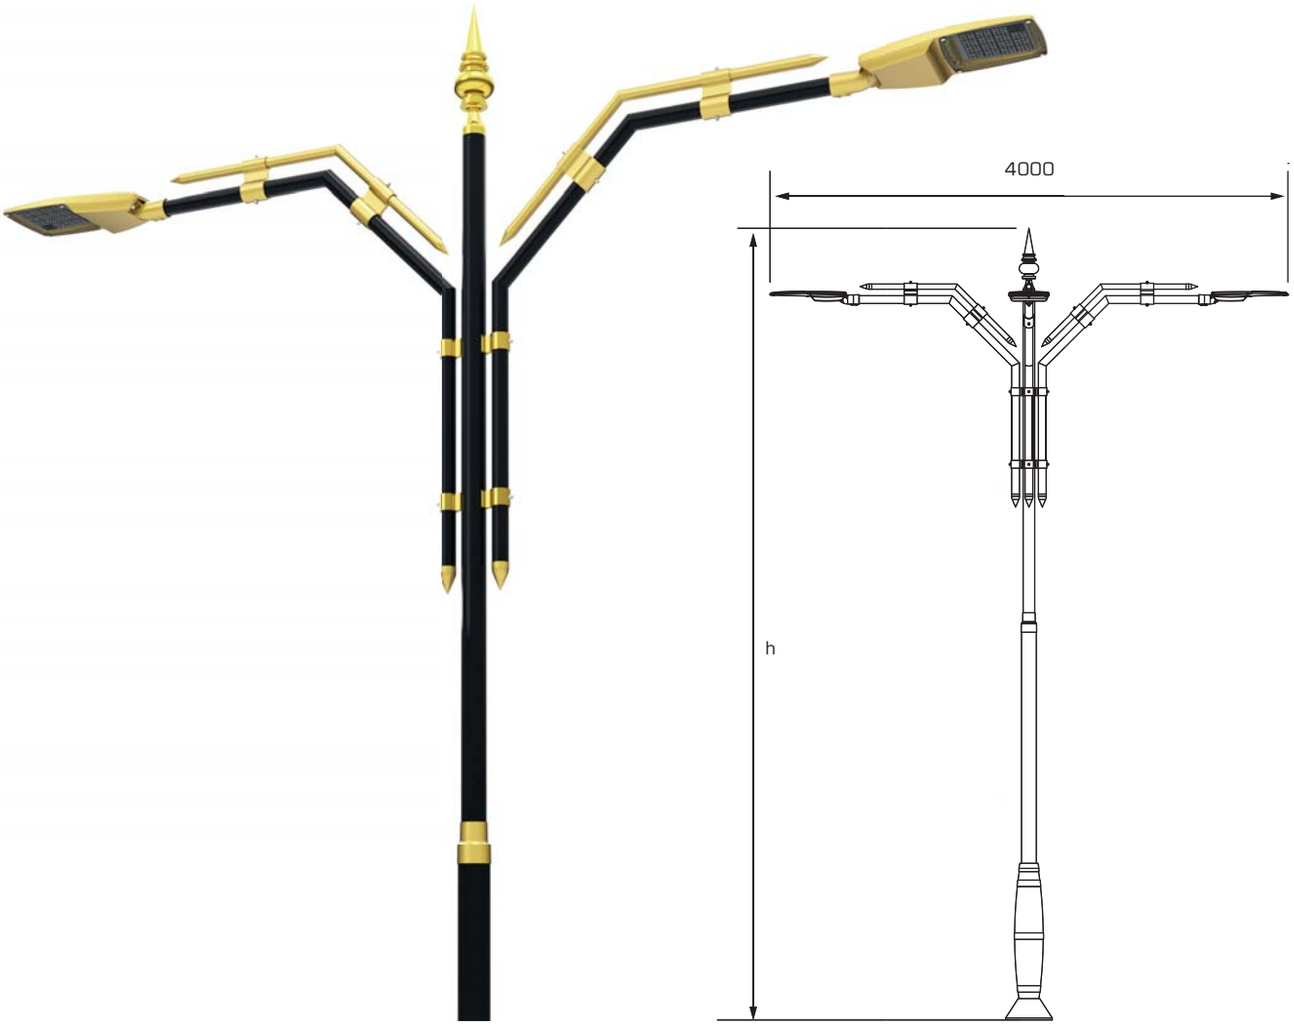

Cordoba

Park&Bahçe&Sokak Aydınlatması | Dekoratif Seri
Park&Garden&Street Lighting | Decorative Series

Teknik Veriler | *Technical Data*

Model *Model*	Güç *Power*	Işık Akısı *Lumen Flux*	Uzunluk (h) *Length*
Cordoba	70Wx2	16800lm	6m
Cordoba	70Wx2	16800lm	8m
Cordoba	105Wx2	25200lm	10m
Cordoba	140Wx2	33600lm	12m

Mekanik özellikler

• Tercihe göre korozyona dayanıklı alüminyum ekstrüzyon veya çelik profil gövde
• Elektronik bileşenleri soğutmak için mükemmel ısı dağılımı
• Isıya ve darbeye dayanıklı IP Lens grubu
• Paslanmaz vidalar
• Alüminyum döküm kaide
• Silikon conta
• Isı geçirgenliği yüksek elektrostatik polyester toz boya
• EN-60598 Avrupa Standartlarına uygundur
• Mekanik dayanım direnci IK08
• Neme ve toza karşı koruma sınıfı IP66
• Elektriksel koruma sınıfı Class I

Mechanical properties

• Corrosion resistant die-cast aluminium extrusion body or stainless steel body
• Excellent heat dissipation for cooling electronic components
• Impact and heat resistant IP lens group
• Stainless steel screws
• Aluminum casting base
• Waterproof and durable silicone gaskets
• Electrostatic polyester powder coating with high thermal conductivity
• In compliance with European Standards EN-60598
• Mechanical impact resistance IK08
• Protection level IP66
• Electrical protection Class I

Ürün detayları | *Product details*



Aksesuarlar | *Accessories*

Sigorta
Fuse

Parafudr
Surge protection device

GUARANTY 3 yrs | CE | TSE | RoHS | EAC | DRIVER | IP 66 | IK 08 IK 10 | 220V-240V 50/60Hz | Ta -40° +50° | Ra>70 | Pf>0,9 | ⏚