




Giza

Park&Bahçe&Sokak Aydınlatması | Modern Seri
Park&Garden&Street Lighting | Modern Series



Giza



Park&Bahçe&Sokak Aydınlatması | Modern Seri
Park&Garden&Street Lighting | Modern Series

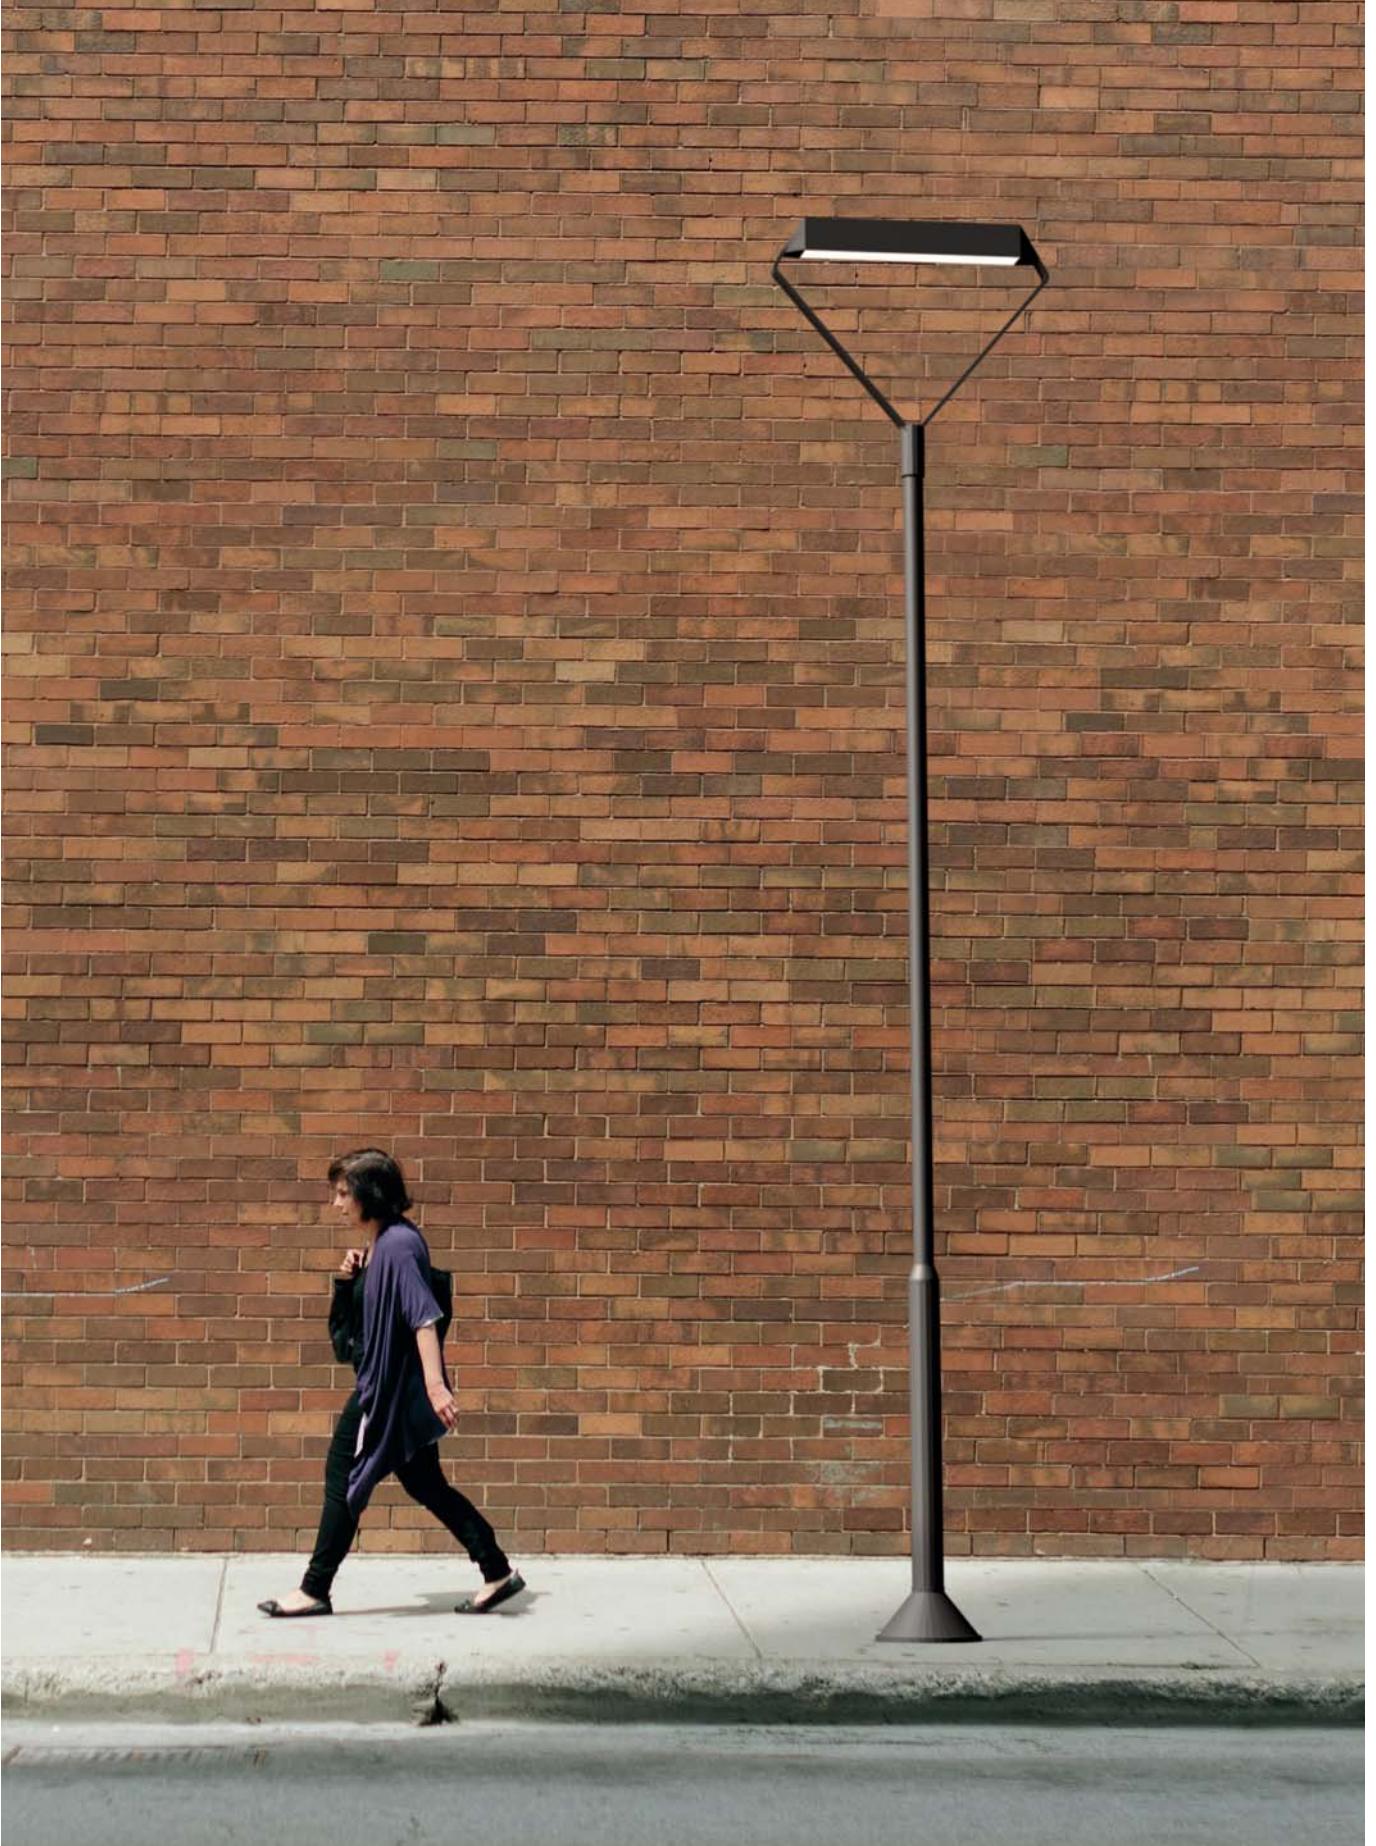



Giza

Park&Bahçe&Sokak Aydınlatması | Modern Seri
Park&Garden&Street Lighting | Modern Series

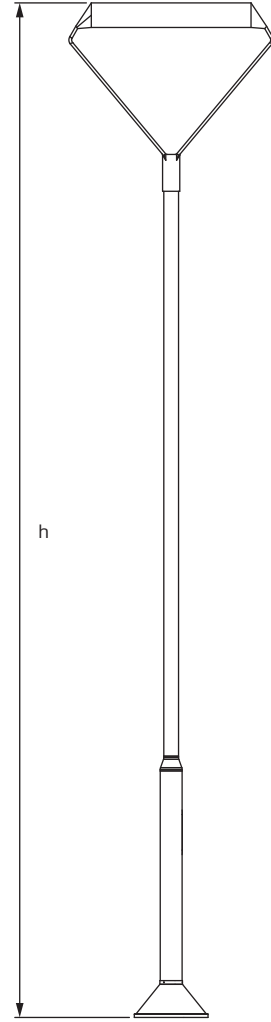

Giza

Park&Bahçe&Sokak Aydınlatması | Modern Seri
Park&Garden&Street Lighting | Modern Series



Teknik Veriler | Technical Data

Model Model	Güç Power	Işık Akısı Lumen Flux	Uzunluk (h) Length
Giza	40W	3400lm	4m
Giza	60W	5100lm	5m
Giza	85W	7225lm	6m


Mekanik özellikler

- Tercihe göre korozyona dayanıklı alüminyum ekstrüzyon veya çelik profil gövde
- Elektronik bileşenleri soğutmak için mükemmel ısı dağılımı
- Isıya ve darbeye dayanıklı IP Lens grubu
- Paslanmaz vidalar
- Silikon conta
- Isı geçirgenliği yüksek elektrostatik polyester toz boya
- EN-60598 Avrupa Standartlarına uygundur
- Mekanik dayanım direnci IK08
- Neme ve toza karşı koruma sınıfı IP66
- Elektriksel koruma sınıfı Class I

Mechanical properties

- Corrosion resistant die-cast aluminium extrusion body or stainless steel body
- Excellent heat dissipation for cooling electronic components
- Impact and heat resistant IP lens group
- Stainless steel screws
- Waterproof and durable silicone gaskets
- Electrostatic polyester powder coating with high thermal conductivity
- In compliance with European Standards EN-60598
- Mechanical impact resistance IK08
- Protection level IP66
- Electrical protection Class I

Ürün detayları | Product details

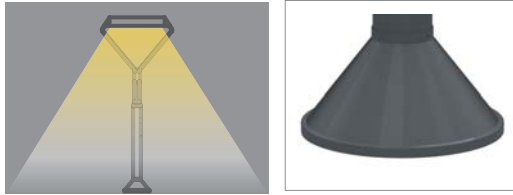

Aksesuarlar | Accessories



Sigorta
Fuse

Parafudr
Surge protection device

