



## Siena

Park&Bahçe&Sokak Aydınlatması | Dekoratif Seri  
*Park&Garden&Street Lighting | Decorative Series*

---



## Siena




Park&Bahçe&Sokak Aydınlatması | Dekoratif Seri  
*Park&Garden&Street Lighting | Decorative Series*





# Siena

Park&Bahçe&Sokak Aydınlatması | Dekoratif Seri  
Park&Garden&Street Lighting | Decorative Series

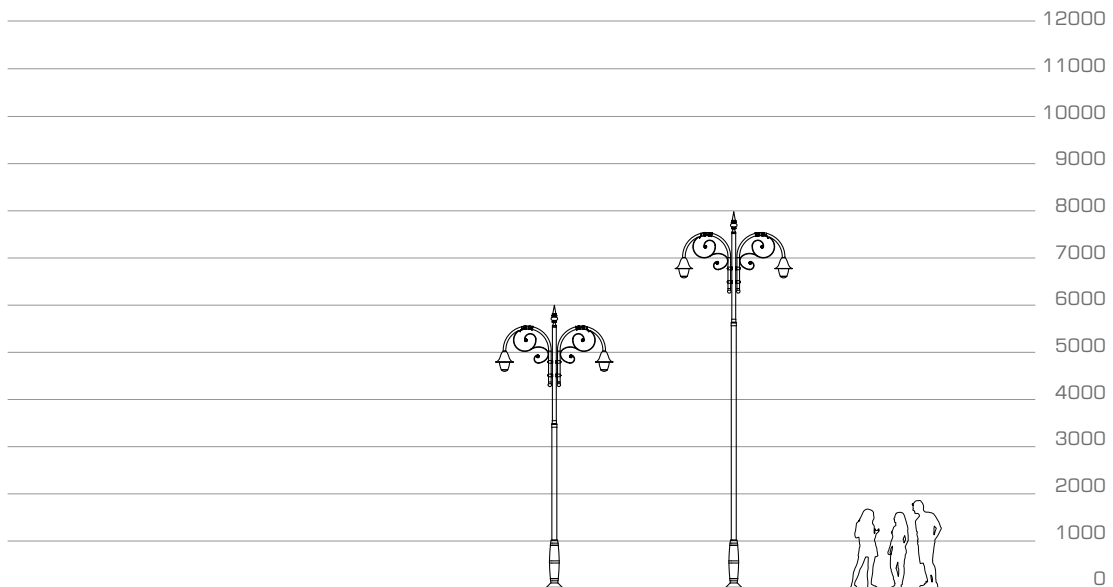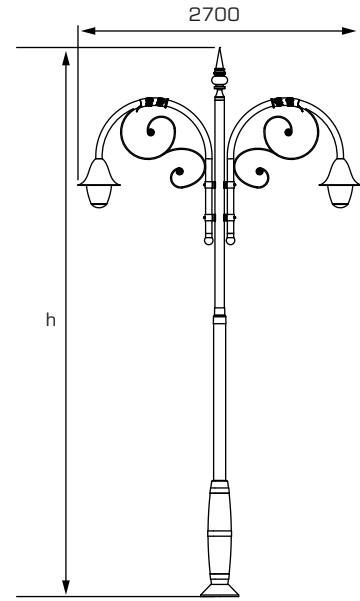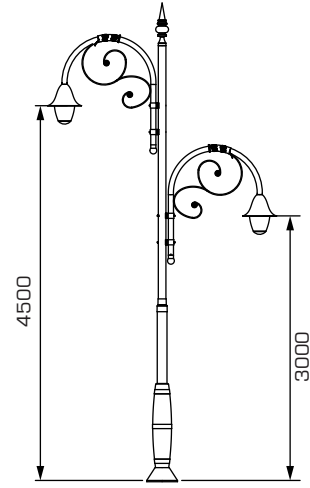

# Siena

Park&Bahçe&Sokak Aydınlatması | Dekoratif Seri  
Park&Garden&Street Lighting | Decorative Series



## Teknik Veriler | Technical Data

Model Model	Güç Power	Işık Akısı Lumen Flux	Uzunluk (h) Length
Siena	75Wx2	12750lm	6m
Siena	75Wx2	12750lm	8m

## Mekanik özellikler

- Tercihe göre korozyona dayanıklı alüminyum ekstrüzyon veya çelik profil gövde
- Elektronik bileşenleri soğutmak için mükemmel ısı dağılımı
- Isıya ve darbeye dayanıklı IP Lens grubu
- Paslanmaz vidalar
- Alüminyum döküm kaide
- Silikon conta
- Isı geçirgenliği yüksek elektrostatik polyester toz boya
- EN-60598 Avrupa Standartlarına uygundur
- Mekanik dayanım direnci IK08
- Neme ve toza karşı koruma sınıfı IP66
- Elektriksel koruma sınıfı Class I

## Mechanical properties

- Corrosion resistant die-cast aluminium extrusion body or stainless steel body
- Excellent heat dissipation for cooling electronic components
- Impact and heat resistant IP lens group
- Stainless steel screws
- Aluminum casting base
- Waterproof and durable silicone gaskets
- Electrostatic polyester powder coating with high thermal conductivity
- In compliance with European Standards EN-60598
- Mechanical impact resistance IK08
- Protection level IP66
- Electrical protection Class I

## Ürün detayları | Product details



## Aksesuarlar | Accessories



Sigorta  
Fuse



Parafudr  
Surge protection device

GUARANTY 3 yrs	CE	TSE	RoHS	ERC	DRIVER	IP 66	IK 08 IK 10	220V-240V 50/60Hz	Ta -40° +50°	Ra>70	Pf>0,9	⊕
-------------------	----	-----	------	-----	--------	----------	----------------	----------------------	-----------------	-------	--------	---