

- 3mm 316 L chrome spot frame
- Corrosion protection by double layered electrostatic powder coated body
- 316 L Press forming chrome body
- 12 mm tempered glass
- Stainless connectors
- Plastic injection mounting box
- Operates with alternate or direct current
- Underwater connector
- H07RNF rubber cable

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
AC3F09	WW-NW-CW	12-24V DC	25	2.400	1,9
AC3F09	WW-NW-CW	12V DC	13	1.200	1,9
AC3F09	RGB	12V DC	18	-	1,9

Power and Lumen values provided are based off of a lensless product with cold white (CW) LED. It may vary according to the desired color.

C Light Color Options

● WW: Warm White	3000K	● R: Red	625nm
● NW: Natural White	4000K	● G: Green	525nm
● CW: Cold White	6500K	● B: Blue	465nm
● RGB		● A: Amber	590nm

S System Options

- 01 Standart (ON/OFF)
- 02 PWM-DIM
- 03 Invert PWM-DIM

O Lens Options




XN: Extra Narrow Angle

N: Narrow Angle

M: Medium Angle

XW: Without lens

Mounting

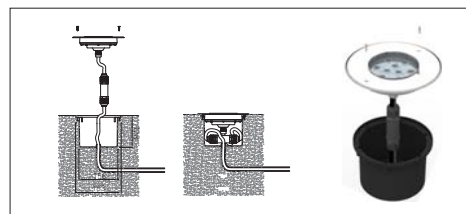


Order Code

P . W . C . S . O



Product Diagrams

Polar Diagram

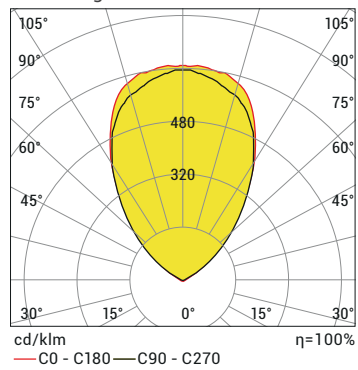







Conical Diagram

H (mt)	\varnothing (m)	E _{max} (lx)
3.0	4,49	169
2.5	3,74	243
2.0	2,99	380
1.5	2,24	675
1.0	1,50	1520
0.5	0,75	6079

AC3F 9LED CW 60D 25W 12-24V DC IP68

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW 	•			•	•	
R,G,B,A 	•			•	•	
RGB 	•					
RGBA/W 						
RGB DMX 			•			
WHITE DMX 			•			

Product Code	Voltage (V DC)	Control Systems	Cable Core Quantity		
			Mono	RGB	RGB W/A
AC3N09	12	PWM	2x	4x	-
	12-24	ON/OFF	2x	-	-
	12-24	INV-PVM	3x	5x	-



Maxx Royal Hotel, Antalya