

- Chrome coated or PC spot frame in white color
- 316 L Press forming chrome body or aluminum injection electrostatic powder coated body
- Polycarbonate glass
- 316 L Stainless connectors
- Operates with alternate or direct current
- Underwater connector
- H07RNF rubber cable

## P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
AC5N18	WW-NW-CW	12-24V DC	21	2.100	0,8-1,7
AC5N18	WW-NW-CW	12-24V DC	32	3.200	0,8-1,7
AC5N18	WW-NW-CW	12-24V DC	46	4.800	0,8-1,7
AC5N18*	RGB	24V DC	26	-	0,8-1,7
AC5N18*	RGB	24V DC	36	-	0,8-1,7

Power and Lumen values provided are based off of a lensless product with cold white (CW) LED. It may vary according to the desired colour. Product weight provided is based off of chrome and aluminum options.  
\*RGB products can be produced in 12-24 V DC and product values may vary.

## C Light Color Options

● WW: Warm White	3000K	● R: Red	625nm
● NW: Natural White	4000K	● G: Green	525nm
● CW: Cold White	6500K	● B: Blue	465nm
● RGB		● A: Amber	590nm

## S System Options

- 01 Standart (ON/OFF)
- 02 PWM-DIM
- 03 Invert PWM-DIM

## O Lens Options



XN: Extra Narrow Angle    M: Medium Angle    W: Wide angle    XW: Without lens

## B Body Options



09: Aluminum Body - IP67    10: Chrome Body - IP68

\*Additional underwater cable joint has to be used in need of extra underwater cables.

## K Cable Direction Options



08: Single entry through center    09: Single bottom entry    10: Entry and exit through cover

\*Additional underwater cable joint has to be used in need of extra underwater cables.




Order Code

P . W . C . S . O . B . K . U



## Product Diagrams

Polar Diagram

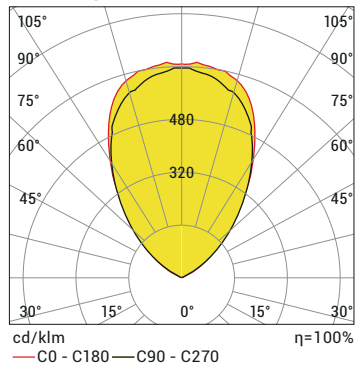

Conical Diagram

H (mt)	Ø (m)	E <sub>max</sub> (lx)
3.0	4,62	148
2.5	3,85	213
2.0	3,08	332
1.5	2,31	591
1.0	1,54	1330
0.5	0,77	5319

AC5N 18LED CW 60D 20W 12-24V DC IP67


## U Upper Piece Options



15: Chrome coated spot frame 16: Plastic spot frame in white

## Mounting Options

Stand extension pieces



34: 5cm  
35: 10cm  
36: 20cm

## Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW	•	•		•	•	
R,G,B,A	•	•		•	•	
RGB	•	•				
RGBA/W						
RGB DMX			•			
WHITE DMX			•			

Product Code	Voltage (V DC)	Control Systems	Cable Core Quantity		
			Mono	RGB	RGB W/A
AC5N18	24	PWM	2x	4x	-
	12-24	ON/OFF	2x	-	-
	12-24	INV-PVM	3x	5x	-



Ornamental Pool, İzmir