

- 2,5 mm wall thickness electrostatic powder coated aluminum injection body
- Polycarbonate injection PC diffuser cover
- Stainless fittings
- IP67 driver with 6kV surge immunity

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight** (kg)
ARC CIRCO	WW-NW-CW	220-240V AC	60	5.000	4,8

*Power and Lumen values provided are based off of a "cold white (CW) LED".
 **Product weights are provided without the weight of the pole

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

*Different colors are optional

S Driver Options

- 01 Standard Driver
- 06 DALI Driver

G Housing Color Options



Accessory options



24011271
Mounting Accessory

* Can be mount on Ø60mm pole with mounting accessory




Order Code

P . W . C . S . G



Product Diagrams

Polar Diagram

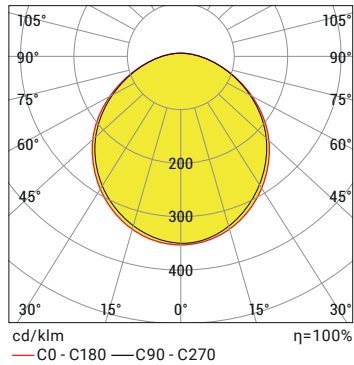

Conical Diagram

H (mt)	Ø (m)	E _{max} (lx)
0.5	1.30	7216
1.0	2.60	1804
1.5	3.90	802
2.0	5.19	451
2.5	6.49	289
3.0	7.79	200

ARC CIRCO NW40 60W 220V AC IP66

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				•	•	
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						



Konyaalti Beach, Antalya