



IP 65
IK 08

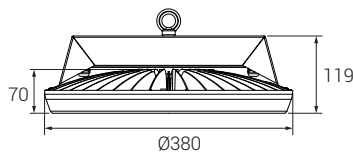

- Electrostatic painted aluminum injection body
- High efficiency group lens
- Efficiency up to 165 lm / W
- Optional stainless steel mounting clip
- Optional stainless Busbar mounting bracket

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
AY380-PRO	WW-NW-CW	220-240V AC	100	16.000	3,6
AY380-PRO	WW-NW-CW	220-240V AC	120	20.000	3,7
AY380-PRO	WW-NW-CW	220-240V AC	150	24.000	3,7
AY380-PRO	WW-NW-CW	220-240V AC	180	27.000	3,9

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

*Different colors are optional

O Lens Options




M: Medium Angle
W: Wide Angle

G Housing Color Options



RAL9005 RAL9007 RAL9016

M Mounting Options

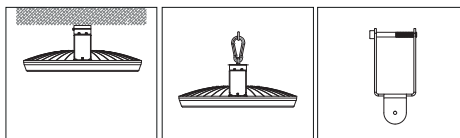

M01: Surface Cable Tray Mounting
M02: Pendant Mounting
M03: Busbar Hanger

*For M02 option rope not included

S Driver Options

- 01 Standard Driver
- 06 DALI Driver

J Junction Options




01: Cable 02: IP67 Socket




Order Code

P . W . C . S . O . G . J . M



Product Diagrams

Polar Diagram

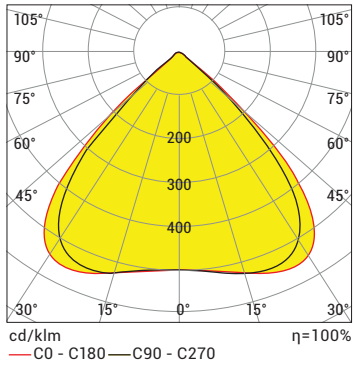


Conical Diagram

H (mt)	\emptyset (m)	Emax (lx)
0.5	1.04	44295
1.0	2.07	11074
1.5	3.11	4922
2.0	4.14	2768
2.5	5.18	1772
3.0	6.21	1230

AY380 CW50 90D 150W 220VAC IP65

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				•	•	
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						

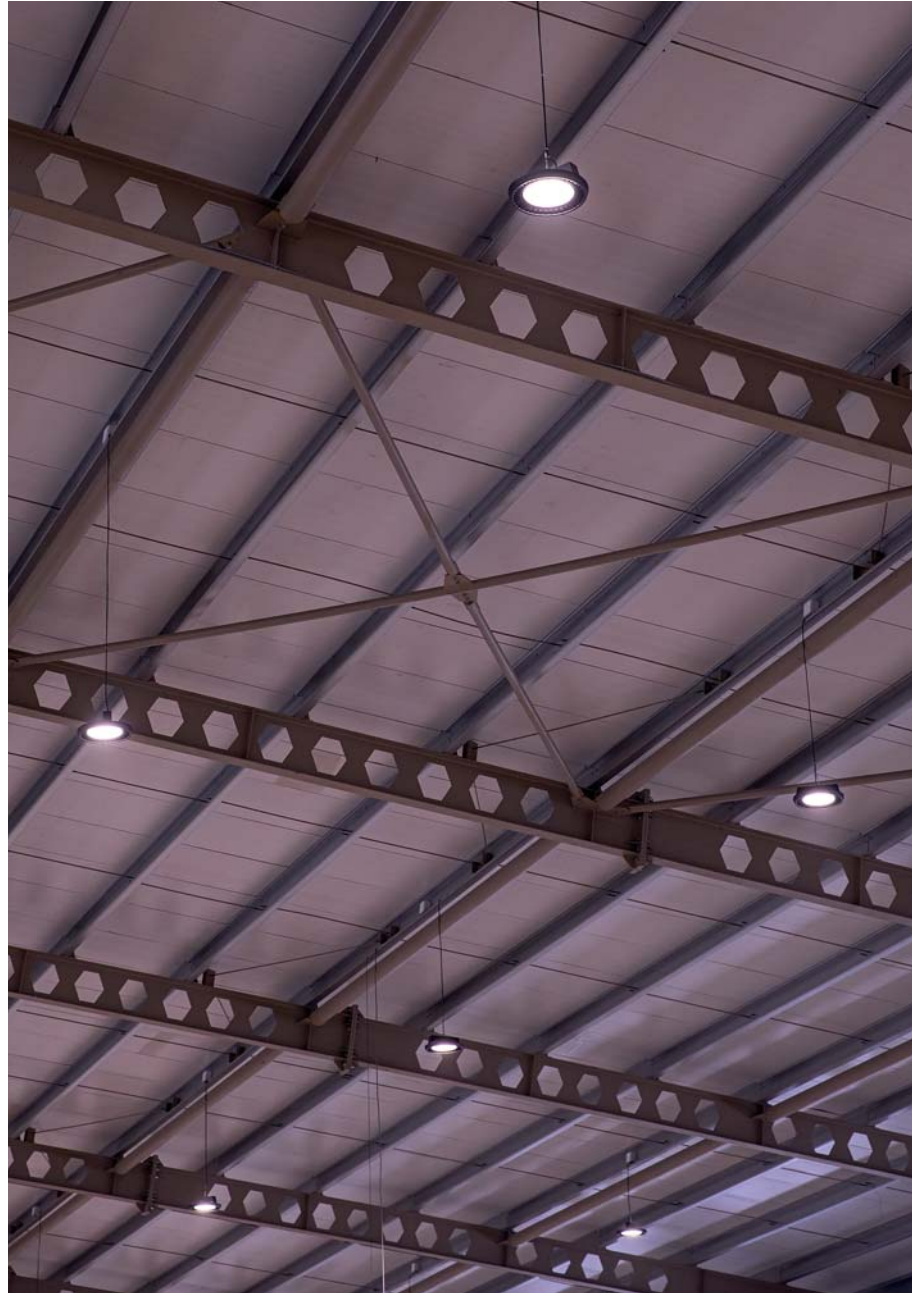

Alumen Yapı Sistemleri, Antalya