

- Professional LED light source architectural spotlight
- Optical solutions with 5 different beam angles
- Electrostatic powder-coated aluminum body
- Operating temperature: -20 to +40 °C
- Optional honeycomb louver
- 5 different mounting options
- Adjustable angled mounting bracket
- Sleek and aesthetic design

P W Product & Power Options

Product Name	Light Color	Voltage (V)	Power (W)	Luminous Flux (lm)
BELLA-500	WW-NW-CW	220-240VAC	1,5	110
BELLA-500	WW-NW-CW	24VDC	1,5	-

*Power and Lumen values provided are based off of a coverless product with cold white (CW) LED.

C Light Color Options


● WW: Warm White	2700K	● R: Red	625nm	● RGB
● WW: Warm White	3000K	● G: Green	525nm	● RGBW
● NW: Natural White	4000K	● B: Blue	465nm	
● CW: Cold White	5700K			
● CW: Cold White	6500K			

*Different colors are optional


S Driver Options

- 01 Standart Driver
- 06 DALI Driver


G Body Color Options

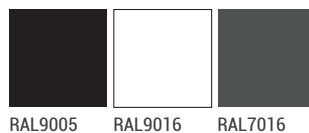

O Lens Options

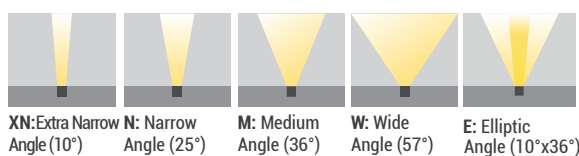

M Mounting Options

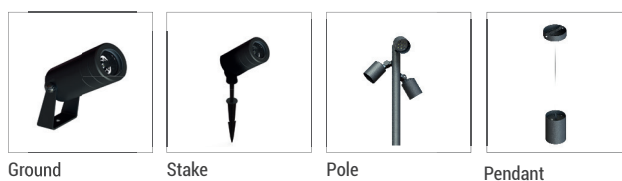


Order Code


P . W . C . S . G . O . M . U



Product Diagrams

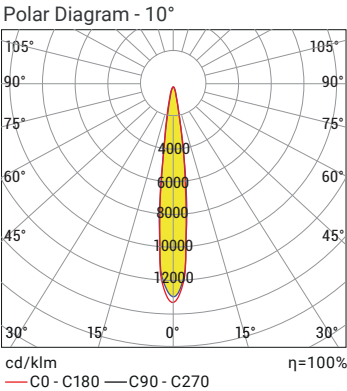

U Upper Cover Options



Without Glare Shield

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	1-10V DC	TRIAC
WW-NW-CW				•		
RGB						
RGBW						