

- Min. 20 micron anodized aluminum extruded profile
- Slim design with 60mm profile
- High efficient homogeneous light by plexy glass diffused cover
- Suitable for pendant mounting.
- Product length standards; 60cm, 90cm, 120cm
- Customization with different body color and coating options

P W Product & Power Options


Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Dimensions (BxC) (mm)	Weight (kg)
BLZM60	WW-NW-CW	220-240V AC	40	3000	600x60	4,8
BLZM60	WW-NW-CW	220-240V AC	60	4500	600x60	4,8
BLZM90	WW-NW-CW	220-240V AC	60	4500	900x60	5,8
BLZM90	WW-NW-CW	220-240V AC	90	6750	900x60	5,8
BLZM120	WW-NW-CW	220-240V AC	85	6375	1200x60	7,4
BLZM120	WW-NW-CW	220-240V AC	125	9375	1200x60	7,4

*Power and Lumen values provided are based off of a cold white (CW) LED.

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

G Housing Color/Coating Options

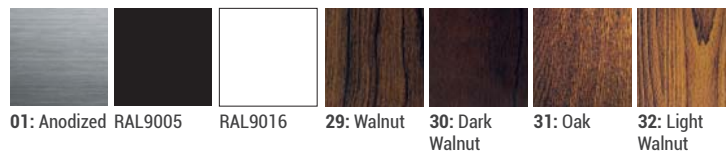

Accessories



33600190: DIMMER

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW ● ● ●				•		
R,G,B,A ● ● ● ●						
RGB ● ● ●						
RGBA/W ● ● ● ● ●						
RGB DMX ● ● ●						
WHITE DMX ●						



Order Code

P . W . C . G

