

- Min. 20 micron anodized aluminum extruded profile
- High efficient homogeneous light by plexiglas diffused cover
- Suitable for pendant mounting
- Product length standards are; 90cm, 120cm, 150cm and 180cm
- Different colors are applicable for the housing
- 1,5 m steel wire hangers are included
- The number of the hangers in the package may vary regarding the product size

P W Product & Power Options


Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Dimensions (BxC) (mm)	Weight (kg)
BLZS90	WW-NW-CW	24V DC	60	4.500	900x100	5,7
BLZS90	WW-NW-CW	24V DC	90	6.750	900x100	5,7
BLZS120	WW-NW-CW	24V DC	85	6.375	1200x100	7,8
BLZS120	WW-NW-CW	24V DC	125	9.375	1200x100	7,8
BLZS150	WW-NW-CW	24V DC	105	7.875	1500x100	10,2
BLZS150	WW-NW-CW	24V DC	155	11.625	1500x100	10,2
BLZS180	WW-NW-CW	24V DC	130	9.750	1800x100	12,1
BLZS180	WW-NW-CW	24V DC	190	14.250	1800x100	12,1
BLZS90	RGB	24V DC	35	-	900x100	5,7
BLZS120	RGB	24V DC	50	-	1200x100	7,8
BLZS150	RGB	24V DC	60	-	1500x100	10,2
BLZS180	RGB	24V DC	75	-	1800x100	12,1

*Power and Lumen values provided are based off of a cold white (CW) LED.


C Light Color Options

● WW: Warm White	3000K	● R: Red	625nm
● NW: Natural White	4000K	● G: Green	525nm
● CW: Cold White	6500K	● B: Blue	465nm
● RGB		● A: Amber	590nm

G Housing Color/Coating Options

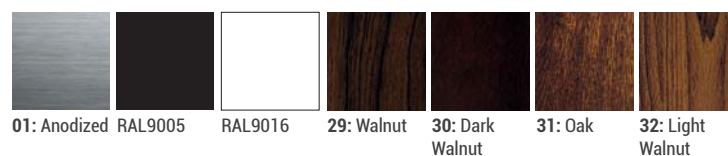

Mounting Accessory

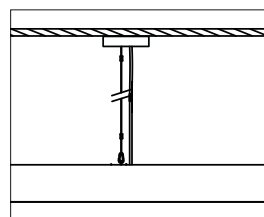

Driver box
(220V LED Driver included)



Order Code


P . W . C . G





Control System Options

	Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW		•			•	•	
R,G,B,A		•			•	•	
RGB		•					
RGBA/W							
RGB DMX							
WHITE DMX							

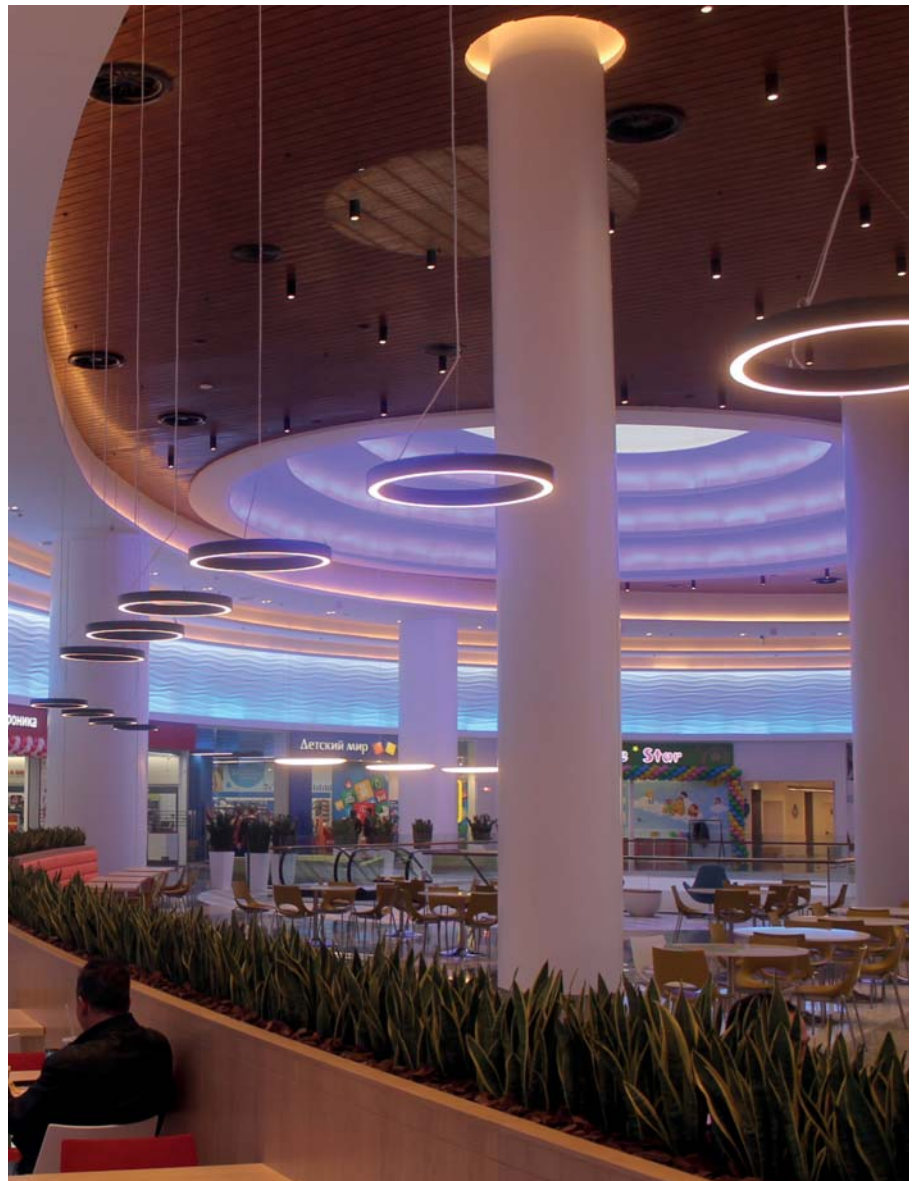

Algorithm Business Center, Russia

Riviera Mall, Russia