


IP 66 IK 10

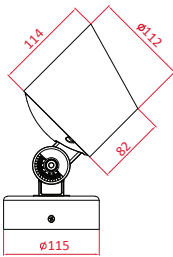

- Professional LED light source architectural spotlight luminaire
- Optical solution with lens and reflector in 5 different angles
- MultiColor and FullColor Technology
- Electrostatic powder-coated aluminum injection body
- -20 to +40 °C Operating temperature

P W Product & Power Options

Product Name	Light Color	Voltage (V)	Power (W)	Luminous Flux (lm)
BELLA-3	WW-NW-CW	220-240V AC	20	1.700
BELLA-3-DMX	RGBW	48V DC	20	-

*Power and Lumen values provided are based off of a coverless product with cold white (CW) LED.

C Light Color Options

● WW: Warm White 3000K	● R: Red 625nm	RGB
● NW: Natural White 4000K	● G: Green 525nm	
● CW: Cold White 6500K	● B: Blue 465nm	RGBW

*Different colors are optional

S Driver Options

- 01 Standart Driver
- 06 DALI Driver

G Body Color Options



RAL9005

O Lens Options



XN: Extra Narrow Angle N: Narrow Angle M: Medium Angle W: Wide Angle

M Mounting Options



Ground Stake Pole Wall Pendant Rail




Order Code


P . W . C . S . G . O . M . U



Product Diagrams

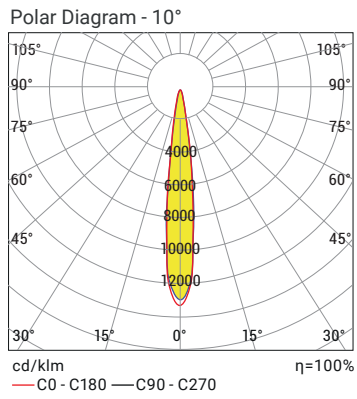

U Upper Cover Options

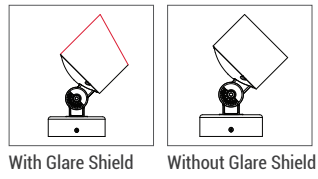

Control System Options

	Color Type	PWM	INV PWM	DMX	DALI	1-10V DC	TRIAC
WW-NW-CW					•	•	
RGB				•			
RGBW				•			