




P W Product & Power Options

Product Name	Light Color	Voltage	Power(W)	Led Quantity	Pixel Options	Lenght (L) (mm)
C-LINE-18-SCRN	RGB	48VDC	8,4	60	10 cm/px	1205
C-LINE-18-SCRN	RGB	48VDC	10,8	80	6 cm/px	1205

C Light Color Options



G Color Options





U Upper Cover Options




No Cover (N/C)

M Mounting Options



- 6 cm/px - 10 cm/px resolution options
- 95% light efficiency with Balanced High Voltage technology
- 48VDC Power Input
- End-to-end connection without wiring infrastructure
- Homogeneous and vivid colors in every pixel with TrueColor Technology
- Resistance to all harsh conditions with Lock & Light System and IP67 connection structure
- Sealed encapsulated structure
- High UV resistance
- Slim design
- 16 million colors
- Ultra lightweight body

Modular Screen Structure

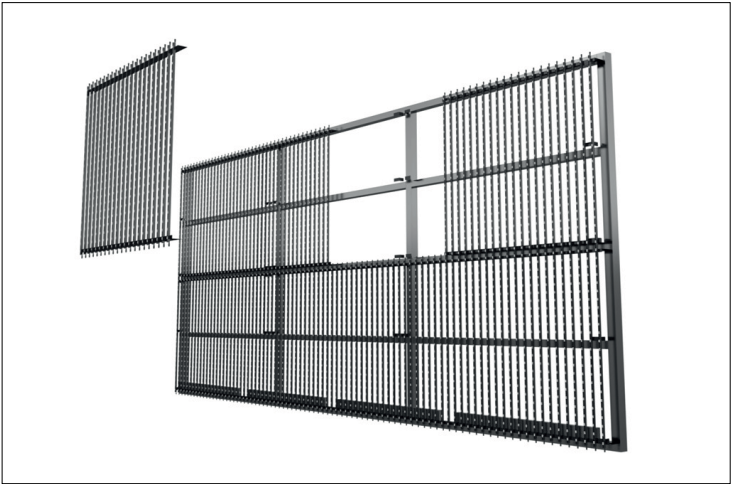


Order Code

P . W . C . G . U . M




Product Diagrams

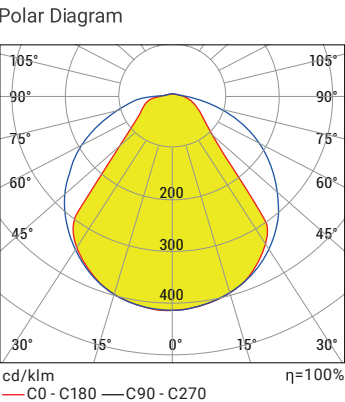


Control System Options

Color Type	PWM	DMX
RGB		•

Pixel Pitch

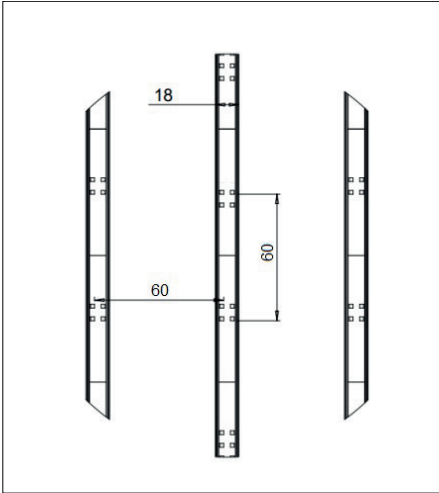

6 cm/px

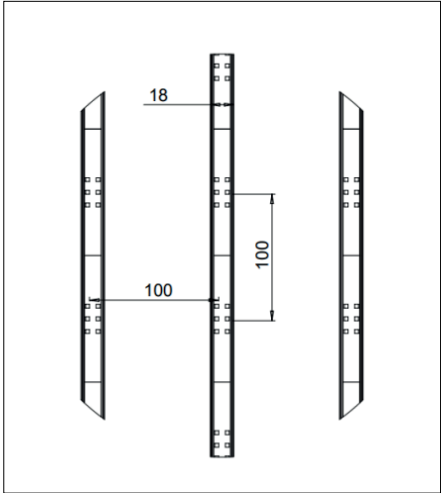

10 cm/px

