

- Electrostatic powder coated aluminum extruded body
- Non-yellowing acrylic luminaire glass
- Anti-glare, high efficient, asymmetrical reflector
- Stainless fittings

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
CBC150	WW-NW-CW	220-240V AC	30	1800	4,5

Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options


● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

G Housing Color Options



Product Diagrams

Polar Diagram

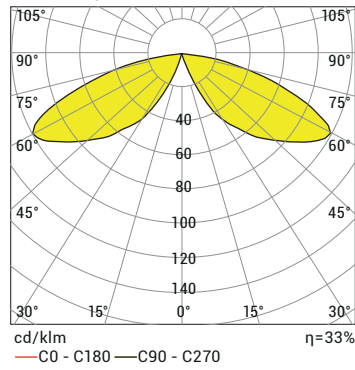

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW						
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						



Order Code

P . W . C . G

