

- Aluminum body
- PMMA lens
- Silicone gland
- Suitable for recessed mounting

P W Product & Power Options


Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm/W)	Weight (kg)
CDC1	WW-NW-CW	220-240V AC	1	100	0,1
CDC1	WW-NW-CW	220-240V AC	3	240	0,1

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White	3000K	● R: Red	625nm
● NW: Natural White	4000K	● G: Green	525nm
● CW: Cold White	6500K	● B: Blue	465nm
		● A: Amber	590nm

O Lens Options

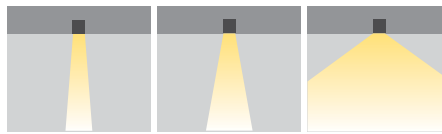


XN: Extra Narrow Angle N: Narrow Angle XW: Without lens




Order Code

P . W . C . O



Product Diagrams

Polar Diagram

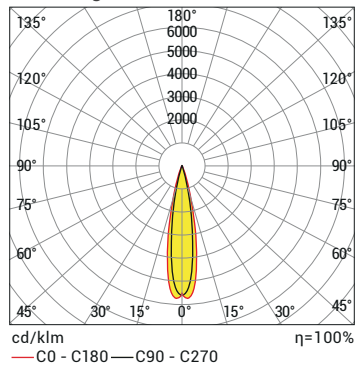






Conical Diagram

H (mt)	Ø (m)	E _{max} (lx)
0.5	0,20	3381
1.0	0,40	845
1.5	0,60	376
2.0	0,81	211
2.5	1,01	135
3.0	1,21	94

CDC1 CW DAR ACI 1,5W 220 VAC 50HZ IP65

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW 						
R,G,B,A 						
RGB 						
RGBA/W 						
RGB DMX 						
WHITE DMX 