

- Electrostatic painted aluminum injection body and frame
- Low-glare (UGR <19) homogeneous light
- Stainless spring system for ceiling mounting
- Suitable for recessed mounting

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Dimensions (AxB) (mm)	Cutting Dimensions (C) (mm)	Weight (kg)
CDEW3-TECO	WW-NW-CW	220-240V AC	5	450	Ø95x45	Ø80	0,3
CDEW4-TECO	WW-NW-CW	220-240V AC	10	900	Ø120x49	Ø105	0,4
CDEW6-TECO	WW-NW-CW	220-240V AC	18	1.620	Ø177x55	Ø155	0,6
CDEW8-TECO	WW-NW-CW	220-240V AC	28	2.520	Ø228x58	Ø205	0,9

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

*Different colors are optional

S Driver Options

- 01 Standard Driver
- 06 DALI Driver
- 11 Driver + Emergency Lighting Kit 1h
- 12 Driver + Emergency Lighting Kit 3h

G Housing Color Options




Order Code

P . W . C . S . G



Product Diagrams

Polar Diagram

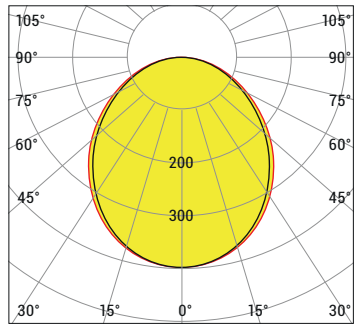

cd/klm
 — C0 - C180 — C90 - C270
 η=100%

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				•	•	
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						



Serp i Molot Bussines Center, Russia