

- Electrostatic powder coated aluminum injection housing
- Polycarbonate luminaire glass
- Chrome front flange
- Stainless connectors
- Suitable for recessed mounting
- Anti-glare reflector (RAL9005)

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
CDP1 03	WW-NW-CW	220-240V AC	4	350	0,9
CDP1 03	WW-NW-CW	220-240V AC	8	700	1,1
CDP1 03	WW-NW-CW	12-24V DC	4	350	0,8
CDP1 03	WW-NW-CW	12-24V DC	8	700	0,8

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

*Different colors are optional

S Driver Options

- 01 Standard Driver
- 06 DALI Driver
- 11 Driver + Emergency Lighting Kit 1h
- 12 Driver + Emergency Lighting Kit 3h

O Lens Options



N: Narrow Angle M: Medium Angle


G Housing Color Options



RAL9005 RAL9016 RAL9007


The products are equipped with a black reflector as standard.

U Upper Piece Options

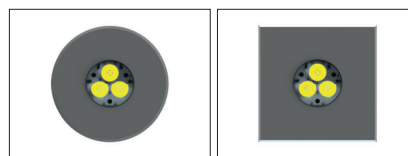

27: Round flange 28: Square flange

M Mounting Options

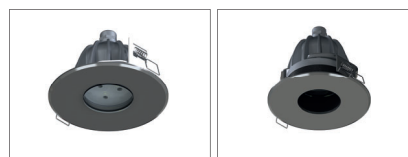


09: Fixed 10: Fixed deep




Order Code

P . W . C . S . O . G . U . M



Product Diagrams

Polar Diagram

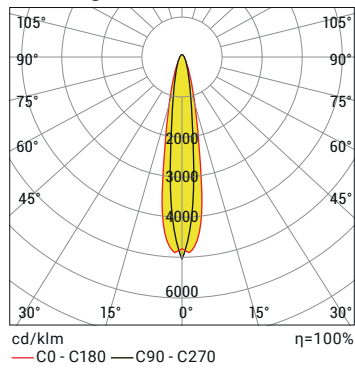

Conical Diagram

H (mt)	Ø (m)	E _{max} (lx)
0.5	0,39	30677
1.0	0,77	7669
1.5	1,16	3409
2.0	1,54	1917
2.5	1,93	1227
3.0	2,32	852

CDP1 P3 NW 25D 4W 220V AC IP65

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				•	•	•
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						

