

- Electrostatic powder coated aluminum housing
- Polycarbonate front glass
- Suitable for surface/pendant mounting

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
CDRB150	WW-NW-CW	220-240V AC	12	1.225	1,1

*Power and Lumen values provided are based off of a cold white (CW) LED.

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

*Different colors are optional

S Driver Options

- 01 Standard Driver
- 06 DALI Driver

O Lens Options




XN: Extra Narrow Angle N: Narrow Angle M: Medium Angle XW: Without Lens Angle

G Housing Color Options



RAL9005 RAL9007 RAL9016

M Mounting Options




25: Pendant 26: Surface




Order Code

P . W . C . S . O . G . M



Product Diagrams

Polar Diagram

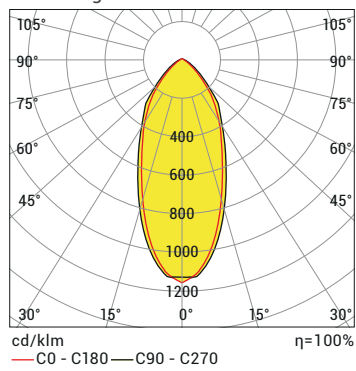

Conical Diagram

H (mt)	Ø (m)	E _{max} (lx)
0.5	0,39	5248
1.0	0,78	1312
1.5	1,16	583
2.0	1,55	328
2.5	1,94	210
3.0	2,33	146

CDRB 150 CW 60D 12W 220V AC IP54

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				•		
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						

