

- Electrostatic powder coated aluminum injection housing
- Anodized aluminum cooler
- Impact resistant front glass
- High efficiency anodized reflector
- Suitable for surface mounting

## P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
CDRB80	WW-NW-CW	220-240V AC	8	680	1,2


\*Power and Lumen values provided are based off of a cold white (CW) LED.

## C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

\*Different colors are optional

## O Lens Options




## G Housing Color Options



## Product Diagrams

### Polar Diagram

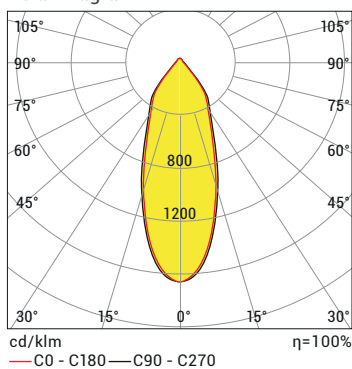

### Conical Diagram

H (mt)	Ø (m)	Emax (lx)
0.5	0,33	4525
1.0	0,67	1131
1.5	1,00	503
2.0	1,33	283
2.5	1,66	181
3.0	2,00	126

CDRB 80 CW 45D 8W 220V AC IP44



Order Code

P . W . C . O . G

