

- Electrostatic painted aluminum injection body and frame
- Low-glare (UGR <19) homogeneous light
- Stainless spring system for ceiling mounting
- Suitable for recessed mounting

## P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Dimensions (AxB) (mm)	Cutting Dimensions (mm)	Weight (kg)
CDRS85-TECO	WW-NW-CW	220-240V AC	8	793	Ø85x84	Ø78	0,2
CDRS100-TECO	WW-NW-CW	220-240V AC	15	1.206	Ø100x87	Ø90	0,3

\*Power and Lumen values provided are based off of a "natural white (NW) LED".

## C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

\*Different colors are optional

## S Driver Options


- 01 Standard Driver
- 06 DALI Driver
- 11 Driver + Emergency Lighting Kit 1h
- 12 Driver + Emergency Lighting Kit 3h

## Control System Options


Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				●	●	
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						

## Product Diagrams

Polar Diagram

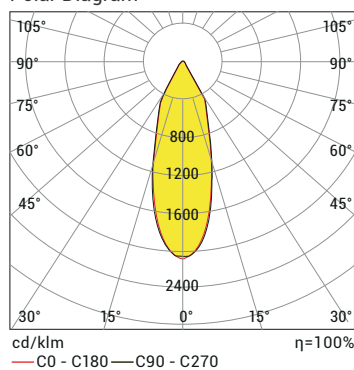

Conical Diagram

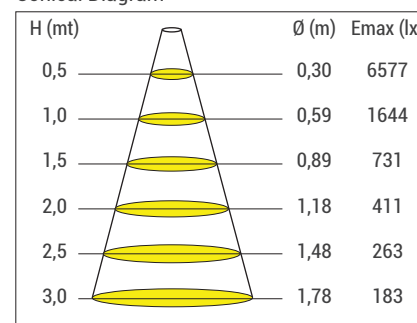

CDRS85-TECO NW40 8W 220VAC IP43



Order Code

P . W . C . S

