

- 316 L chrome flange
- Electrostatic powder coated aluminum injection body
- 8 mm tempered glass
- Plastic injection installation box
- Underwater cable joint
- H07RNF rubber cable

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
CF103	WW-NW-CW	220-240V AC	4	480	1,3
CF103	WW-NW-CW	12-24V DC	4	425	1,1
CF103	RGB	7,5V DC	8	-	1,1



*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White 3000K	● R: Red 625nm
● NW: Natural White 4000K	● G: Green 525nm
● CW: Cold White 6500K	● B: Blue 465nm
● RGB	● A: Amber 590nm

*Different colors are optional

O Lens Options

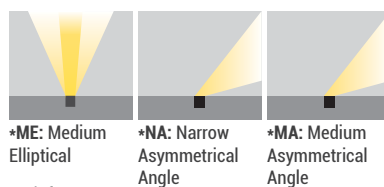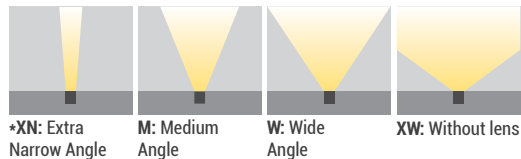

*Only for 220V AC

U Upper Piece Options



23: Square Satin Nickel

21: Round Satin Nickel




Order Code

P . W . C . O . U



Product Diagrams

Polar Diagram

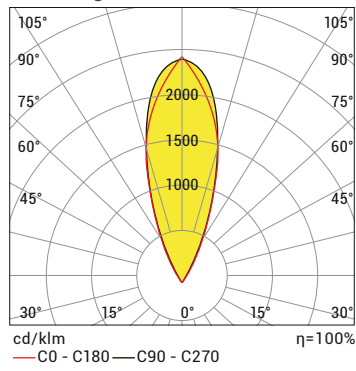

Conical Diagram

H (mt)	\emptyset (m)	Emax (lx)
3.0	1,88	133
1.5	1,57	192
2.0	1,25	300
1.5	0,94	532
1.0	0,63	1198
0.5	0,31	4792


CF1 P3 CW 25D 4.5 W 220V AC IP67

Control System Options

Color Type	PWM	INV PWM	DMX*	DALI*	0-10V DC*	TRIAC
WW-NW-CW	•			•	•	
R,G,B,A	•			•	•	
RGB	•					
RGBA/W						
RGB DMX						
WHITE DMX						

*Only for 24V DC

Product Code	Voltage (V DC)	Control Systems	Cores of Cables Count		
			Mono	RGB	RGB W/A
CF103	7,5	PVM	-	4x	-
	12	PVM	2x	-	-
	12-24	ON/OFF	2x	-	-

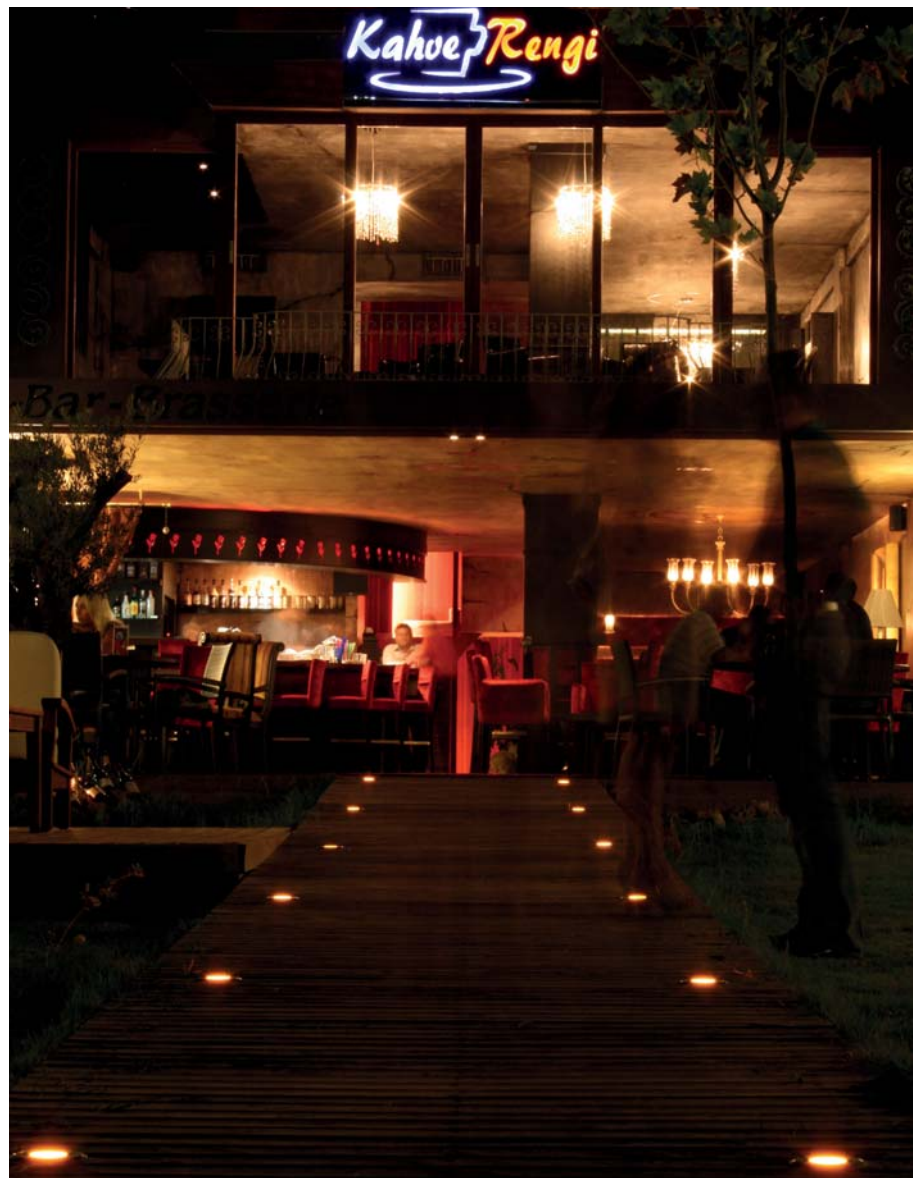

Kahverengi Cafe, Antalya