

- 316L chrome flange
- Electrostatic powder painted, cathoporesis coating aluminum injection body
- 8mm polycarbonate or tempered luminaire glass
- Stainless connector
- Underwater cable joint
- H07RNF rubber cable

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
CG103	WW-NW-CW	220-240V AC	4	440	0,7
CG103	RGB	7,5V DC	8	-	0,7

*Power and Lumen values provided are based off of a lensless product with cold white (CW) LED. It may vary according to the desired colour.

C Light Color Options

● WW: Warm White	3000K	● R: Red	625nm
● NW: Natural White	4000K	● G: Green	525nm
● CW: Cold White	6500K	● B: Blue	465nm
● RGB		● A: Amber	590nm

O Lens Options




XN: Extra Narrow Angle

N: Narrow Angle

W: Wide angle

XW: Without lens


U Upper Piece Options



03: Polycarbonate glass

04: Tempered glass

M Mounting Options

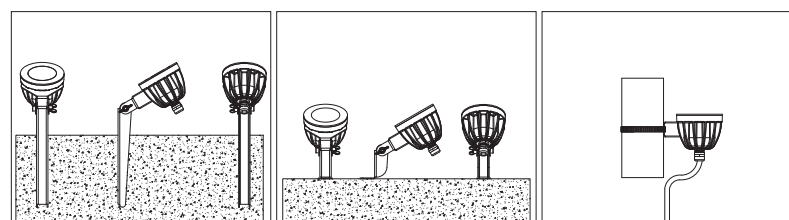

13: Stake Mount

14: Screw Mount

15: Clap Mount




Order Code

P . W . C . O . U . M




Product Diagrams

Polar Diagram

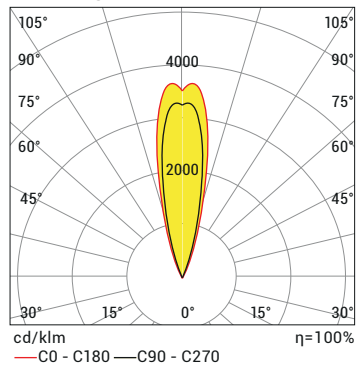

Conical Diagram

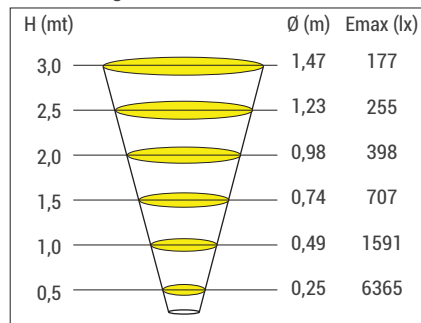

CG1 3 LED CW 25D 4W 220VAC 50HZ IP67

Control System Options

Color Type	PWM	INV PWM	DMX	DALI *	0-10V DC*	TRIAC
WW-NW-CW	•			•	•	
R,G,B,A	•			•	•	
RGB	•					
RGBA/W						
RGB DMX						
WHITE DMX						

*DALI and 0-10V applicable only in DC input

Product Code	Voltage (V DC)	Control Systems	Cable Core Quantity		
			Mono	RGB	RGB W/A
CG103	7,5	PWM	-	4x	-
	12	PWM	2x	-	-
	12-24	ON/OFF	2x	-	-
	12-24	INV-PVM	3x	-	-



Maxx Royal Hotel, Antalya