

- Min. 20 micron anodized aluminum extruded profile
- High efficient homogeneous light via plexiglas diffused cover
- Suitable for pendant/surface mounting
- Different colors are applicable for the housing
- 1,5 m steel wire hangers are included
- The number of the hangers in the package may vary regarding the product size

P W Product & Power Options


Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
DRM Tria	WW-NW-CW	24V DC	135	10.125	7,1

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options


● WW: Warm White 3000K	● R: Red 625nm
● NW: Natural White 4000K	● G: Green 525nm
● CW: Cold White 6500K	● B: Blue 465nm
● RGB	● A: Amber 590nm

G Housing Color/Coating Options

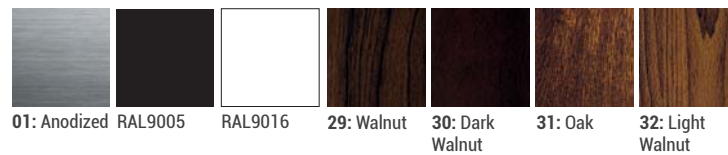


Product Diagrams

Polar Diagram

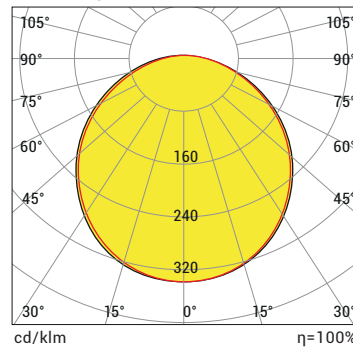

Conical Diagram

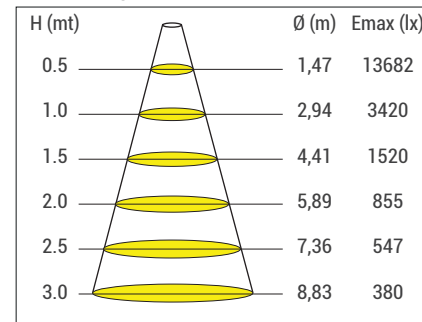

DRM TRIA CW 135W 24V DC IP44

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW	●			●	●	
R,G,B,A	●			●	●	
RGB	●					
RGBA/W	●					
RGB DMX	●					
WHITE DMX	●					



Order Code

P . W . C . G

