

Joystick controlled border lighting projector  
High performance durable design for security lighting

- Minimum 5lx light level at the center point at a distance of 1,000 meters
- 360° horizontal axis, 40° down and 75° upward movement capability
- 250mm long light refractor that provides glare control
- Providing appropriate combination with different lenses
- 10kV surge protection circuit
- Electrostatic powder coated aluminum injection body
- Aluminum, DKP and chrome sheet metal parts specially shaped by laser cutting
- Stainless fittings
- Drawer type locked panel box
- Glass cone shaped light collector
- Stabilizing feet providing safe installation and usage

## P W Product & Power Options

Product Name	Explanation	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Dimensions (AxBxC)
EAGLE-EYES-J	Border lighting	220-240V AC	400	40.000	696x727x358mm

Tilt Range : -75° ~ +40°  
Pan Speed : 0.01 ~ 60°/s  
Pan Range : 0 ~ 360° continuous  
Tilt Speed : 0.01 ~ 30°/s  
Communication : RS-485 / RS-422


## C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

## S Driver Options


- 01 Standard Driver
- 06 DALI Driver

## O Lens Options



XN: Extra Narrow Angle

## G Housing Color Options




RAL9005 RAL9016




Order Code

P . W . C . S . O . G



## Product Diagrams

Polar Diagram

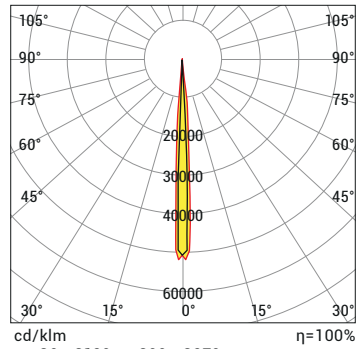

EAGLE-EYES-J NW40 5D 400W 220VAC IP66

## Control System Options

	Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW					•		
R,G,B,A							
RGB							
RGBA/W							
RGB DMX							
WHITE DMX							