

- Min. 20 micron anodized aluminum extruded profile
- Stainless connectors
- ABS end caps with UV protection
- Diffused polycarbonate top cover with UV protection
- Cooling capacity up to 24 W/m
- Suitable for recessed mounting

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W/mt)	Luminous Flux (lm)	Weight (kg)
ERL25	WW-NW-CW	24V DC	7	420	0,95
ERL25	WW-NW-CW	24V DC	14	840	0,95
ERL25	WW-NW-CW	24V DC	24	1.440	0,95


*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

*Different colors are optional.


K Cable Direction Options

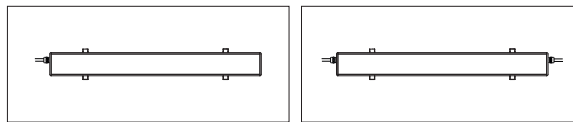

01: Single Entry

03: Dual end exit and entry

U Upper Cover Options

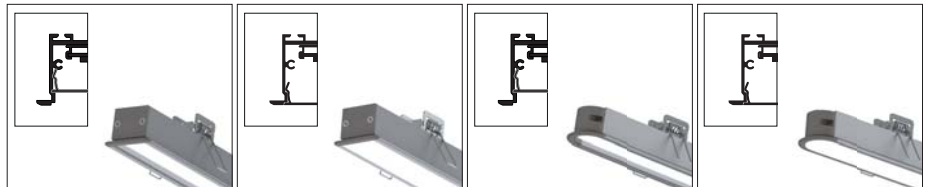

05: Flat Deep Surface

06: Flat Surface

07: Oval Deep Surface

08: Oval Surface


Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW	●			●	●	
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						




Order Code

P . W . C . K . U



Product Diagrams

Polar Diagram

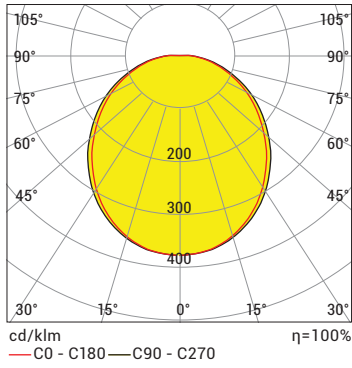


Conical Diagram

H (mt)	\emptyset (m)	Emax (lx)
0.5	0.71	1871
1.0	1.43	468
1.5	2.14	208
2.0	2.85	117
2.5	3.57	75
3.0	4.28	52


ERL25 CW 120D 24W 24V DC IP44D

Product Length Options For ERL25 Flat

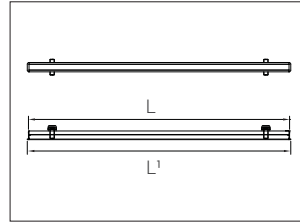

Product Code	*Min. length (L) mm	**Application length mm	Power (W)	Outer Dimension (L1) mm
ERL25	120	100	7	L+14
ERL25	220	200	12	L+14
ERL25	120	100	14	L+14
ERL25	153	133	18	L+14
ERL25	120	100	24	L+14
ERL25	220	200	7	L+14
ERL25	120	100	14	L+14

Product Length Options For ErRL25 Oval

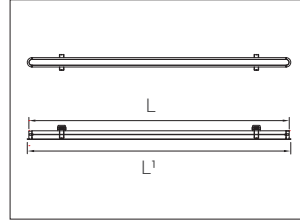

Product Code	*Min. length (L) mm	**Application length mm	Power (W)	Outer Dimension (L1) mm
ERL25	125	100	7	L+14
ERL25	225	200	12	L+14
ERL25	125	100	14	L+14
ERL25	158	133	18	L+14
ERL25	125	100	24	L+14
ERL25	225	200	7	L+14
ERL25	125	100	14	L+14

*L=product length with end caps.

**Application length formula (L) = min. length + (Application length x Qty)



Algorithm Business Center, Russia