

- Anodized aluminum extrusion profile body
- UV protected PVC end caps
- High efficient PMMA diffuser
- Stainless steel mounting brackets
- Hidden IP67 gland
- Optional emergency lighting kit

## P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Length (mm)	Weight (kg)
LLEN60-PRO	WW-NW-CW	220V-240 AC	22	3.300	624	1,1
LLEN120-PRO	WW-NW-CW	220V-240 AC	29	4.350	1224	2,0
LLEN120-PRO	WW-NW-CW	220V-240 AC	40	6.000	1224	2,0
LLEN160-PRO	WW-NW-CW	220V-240 AC	40	6.000	1624	3,5
LLEN160-PRO	WW-NW-CW	220V-240 AC	55	8.250	1624	3,5

\*Power and Lumen values provided are based off of a "cold white (CW) LED".

## C Light Color Options


● WW: Warm White	3000K	● R: Red	625nm
● NW: Natural White	4000K	● G: Green	525nm
● CW: Cold White	6500K	● B: Blue	465nm
		● A: Amber	590nm

\*Different colors are optional

## S Driver Options

- 01 Standard Driver
- 06 DALI Driver
- 11 Driver + Emergency Lighting Kit 1h
- 12 Driver + Emergency Lighting Kit 3h
- 16 Radar Sensor

## U Upper Piece Options




01: Diffused




Order Code

P . W . C . S . U



## Product Diagrams

Polar Diagram

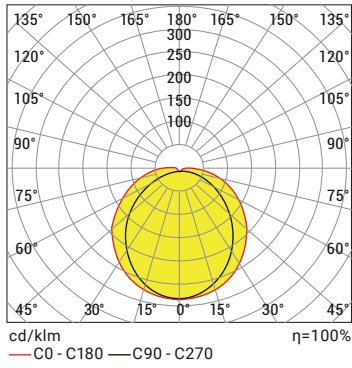


Conical Diagram

H (mt)	$\emptyset$ (m)	E <sub>max</sub> (lx)
0.5	2.18	6686
1.0	4.37	1671
1.5	6.55	743
2.0	8.74	418
2.5	10.92	267
3.0	13.11	186

LLEN120-PRO NW40 40W 220VAC IP65

## Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				•	•	
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						

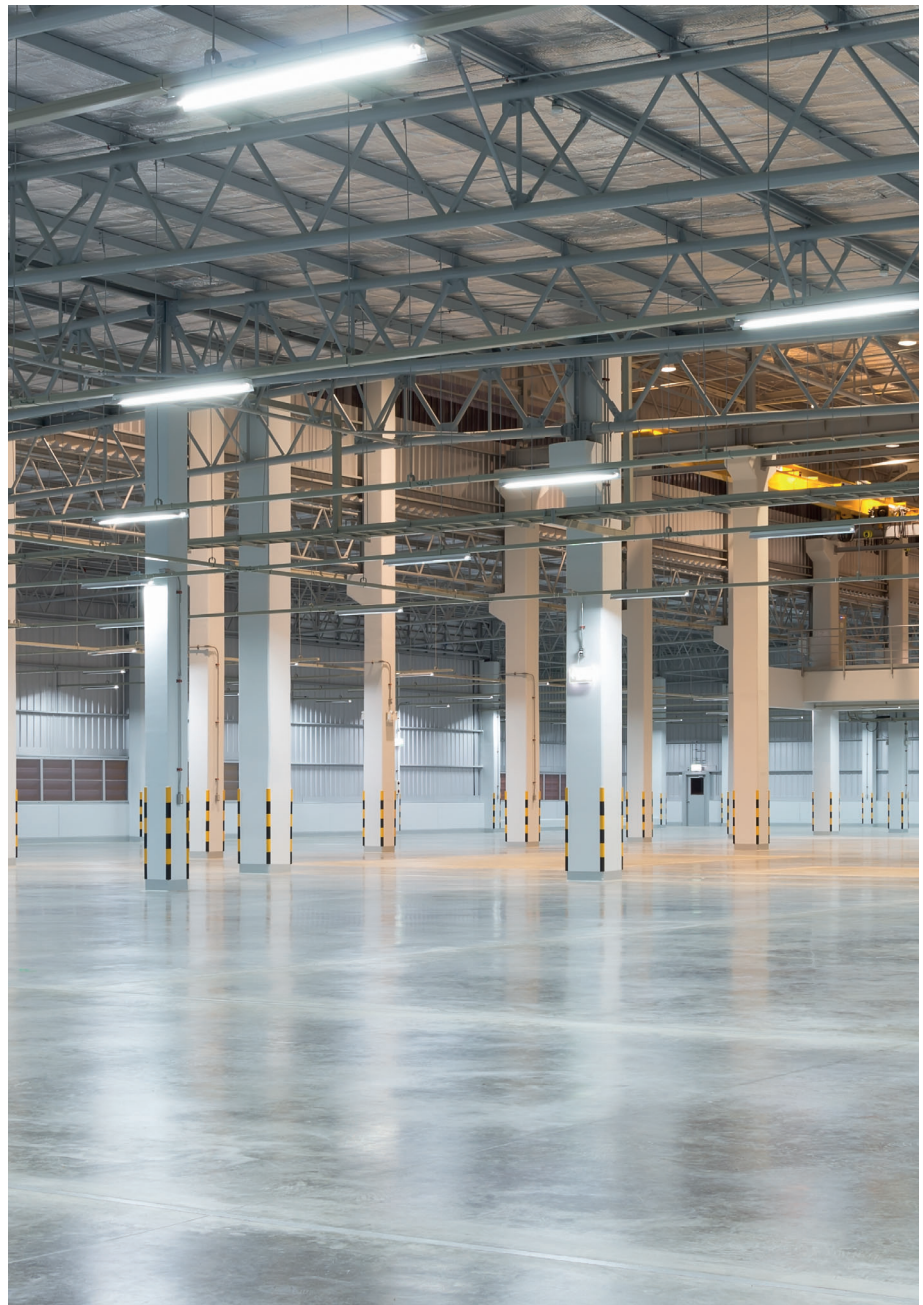

Industrial Factory Lighting