

- Anodized aluminum extrusion profile body
- UV protected PVC end caps
- High efficient PMMA diffuser
- Stainless steel mounting brackets
- Hidden IP67 gland
- Optional emergency lighting kit

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Length (mm)	Weight (kg)
LLEN60-TECO	WW-NW-CW	220V-240 AC	22	2.500	624	1,1
LLEN120-TECO	WW-NW-CW	220V-240 AC	29	3.190	1224	2,0
LLEN120-TECO	WW-NW-CW	220V-240 AC	40	4.400	1224	2,0
LLEN160-TECO	WW-NW-CW	220V-240 AC	40	4.400	1624	3,5
LLEN160-TECO	WW-NW-CW	220V-240 AC	55	6.050	1624	3,5

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options


● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

Control System Options


Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW						
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						

Product Diagrams

Polar Diagram

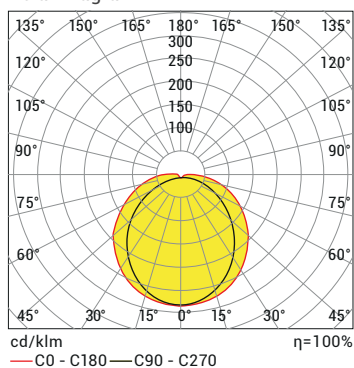

Conical Diagram

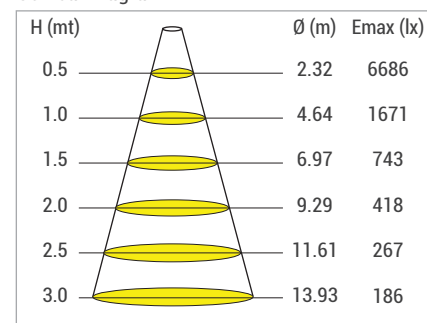

LLEN120-TECO CW65 40W 220VAC IP65



Order Code

P . W . C

