

- Min. 20 micron anodized aluminum extruded profile
- Stainless connectors
- Cooling capacity up to 14,4 W/m
- Suitable for surface mounting

## P W Product & Power Options

Product Name/LED Quantity	Light Color	Input Voltage (V)	Power (W/mt)	Luminous Flux (lm)	Weight (kg)
LLS15LED	WW-NW-CW	24V DC	6	675	0,12
LLS30LED	WW-NW-CW	24V DC	12	1.255	0,12
LLS45LED	WW-NW-CW	24V DC	10,8	1.252	0,12
LLS60LED	WW-NW-CW	24V DC	14,4	1.673	0,12
LLS90LED	WW-NW-CW	24V DC	7,2	1.053	0,12
LLS120LED	WW-NW-CW	24V DC	9,6	1.317	0,12
LLS180LED	WW-NW-CW	24V DC	14,4	1.864	0,12
LLS30LED	RGB	24V DC	7,2	-	0,12
LLS45LED	RGB	24V DC	10,8	-	0,12
LLS60LED	RGB	24V DC	14,4	-	0,12
LLS60LED	RGB/W	24V DC	14,4	-	0,12


\*Power and Lumen values provided are based off of a lensless product with cold white (CW) LED.

## C Light Color Options

● WW: Warm White 3000K	● R: Red 625nm	● RGB
● NW: Natural White 4000K	● G: Green 525nm	● RGBW
● CW: Cold White 6500K	● B: Blue 465nm	● RGBA
● A: Amber 590nm		


\*Different colors are optional

## J Junction Options

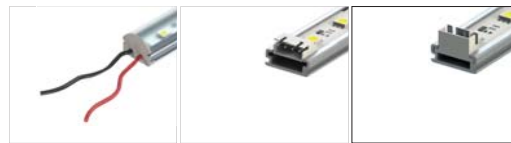

01: Cable      03: Horizontal Socket      04: Vertical Socket

## M Mounting Options

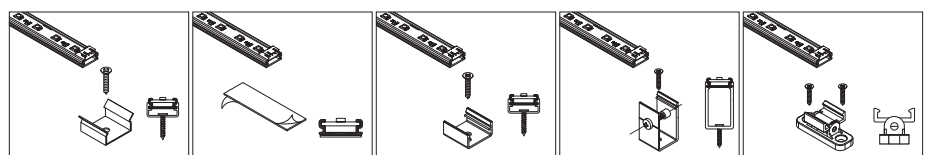


01: Steel Clip      02: Double-Sided Tape      03: Aluminum Clip      04: Aluminum Clip (tall)      05: Angled Clip




Order Code

P . W . C . J . M




## Product Diagrams

Polar Diagram

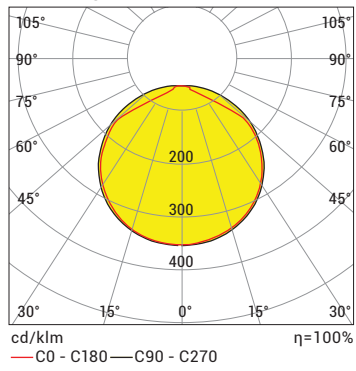



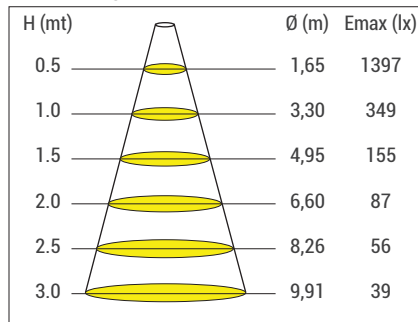




Conical Diagram



LLS 30LED 12W CW 120D 24V DC IP20

## Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW 	•			•	•	
R,G,B,A 	•			•	•	
RGB 	•					
RGBA/W 	•					
RGB DMX 						
WHITE DMX 						

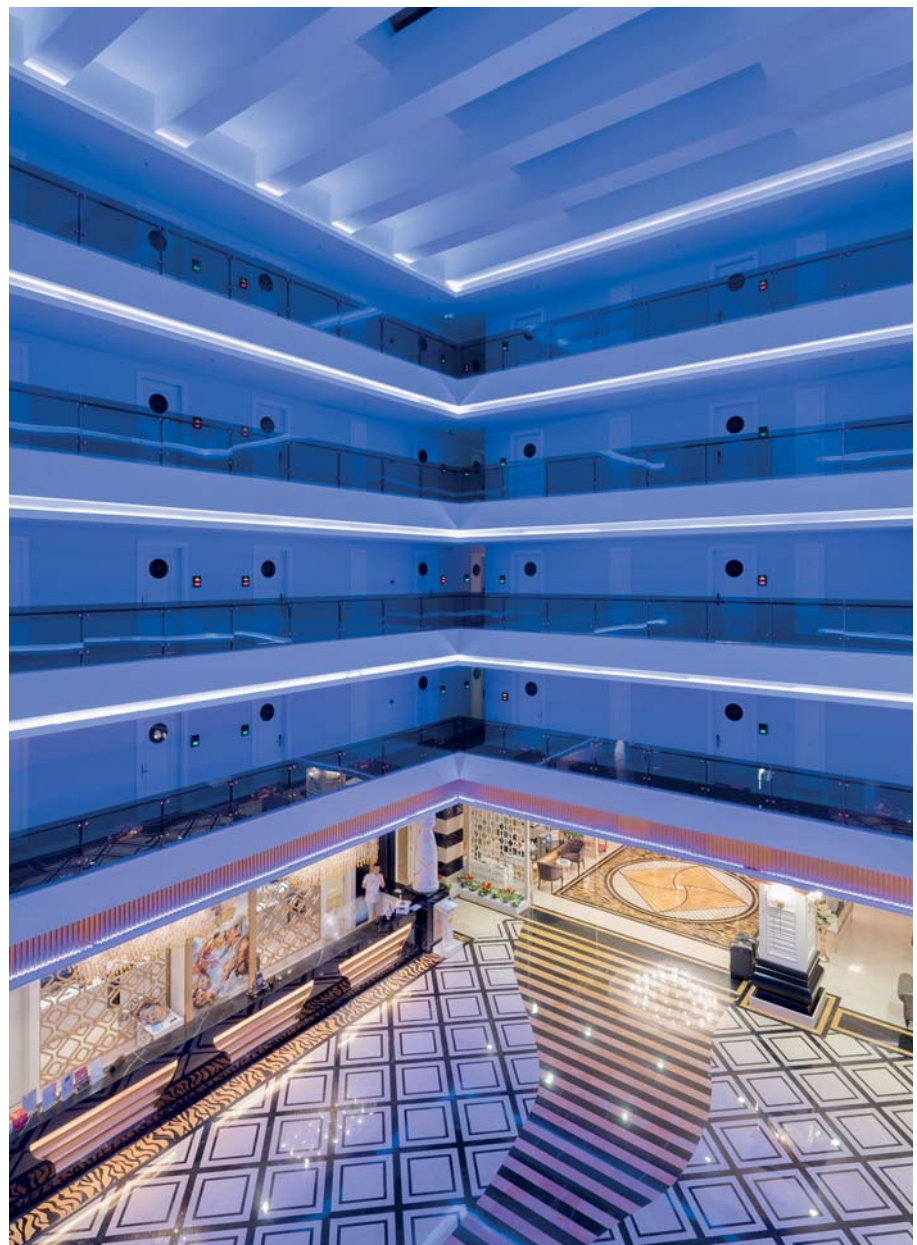

Mary Palace Hotel, Antlaya