

- Electrostatic painted DKP body
- Electrostatic painted DKP frame
- High efficiency low-glare (UGR <19) homogeneous light diffuser
- Efficiency exceeding 100lm/W with backlight technology
- Suitable for recessed use (Clip In)

## P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Dimensions (AxB) (mm)	Weight (kg)
PNCI	WW-NW-CW	220-240V AC	15	1.353	300x300	1,1
PNCI	WW-NW-CW	220-240V AC	26	3.507	600x600	3,2
PNCI	WW-NW-CW	220-240V AC	34	4.175	600x600	3,2
PNCI	WW-NW-CW	220-240V AC	38	4.843	600x600	3,2

\*Power and Lumen values provided are based off of a cold white (CW) LED.

## C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

\*Different colors are optional

## S Driver Options

- 01 Standard Driver
- 06 DALI Driver
- 11 Driver + Emergency Lighting Kit 1h
- 12 Driver + Emergency Lighting Kit 3h




Order Code

P . W . C . S



## Product Diagrams

Polar Diagram

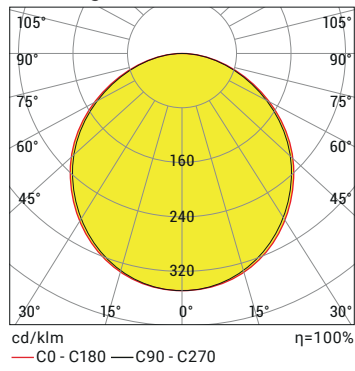

Conical Diagram

H (mt)	Ø (m)	E <sub>max</sub> (lx)
0.5	1,50	4387
1.0	3,00	1097
1.5	4,50	487
2.0	6,00	274
2.5	4,50	175
3.0	9,00	122

PANEL CLIP IN 60x60 CW 120D 30W 220V AC IP40

## Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				•	•	•
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						



Interior Lighting, Antalya