

- Min. 20 micron anodized aluminum extruded profile
- High efficient homogeneous light by plexiglas diffused cover
- Suitable for pendant/surface mounting
- Different colors are applicable for the housing
- 1,5 m steel wire hangers are included
- The number of the hangers in the package may vary regarding the product size

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Measurements (AxB) (mm)	Weight (kg)
QDR ² 6060	WW-NW-CW	24V DC	24	1.800	600x600	6,3
QDR ² 6060	WW-NW-CW	24V DC	64	4.800	600x600	6,3
QDR ² 60120	WW-NW-CW	24V DC	128	9.600	600x1200	11,2
QDR ² 60120	WW-NW-CW	24V DC	202	15.150	600x1200	11,2
QDR ² 120120	WW-NW-CW	24V DC	300	22.500	1200x1200	10,8

*Power and Lumen values provided are based off of a cold white (CW) LED.

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

G Housing Color/Coating Options



01: Anodized RAL9005 RAL9016 29: Walnut 30: Dark Walnut 31: Oak 32: Light Walnut




Order Code

P . W . C . G




Product Diagrams

Polar Diagram

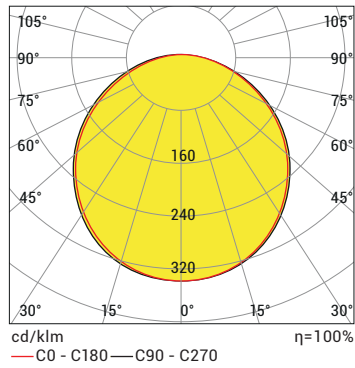


Conical Diagram

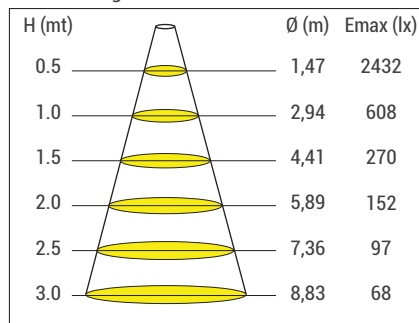

QDR² 60x60 CW 24W 24V DC IP44

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW	•			•	•	
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						

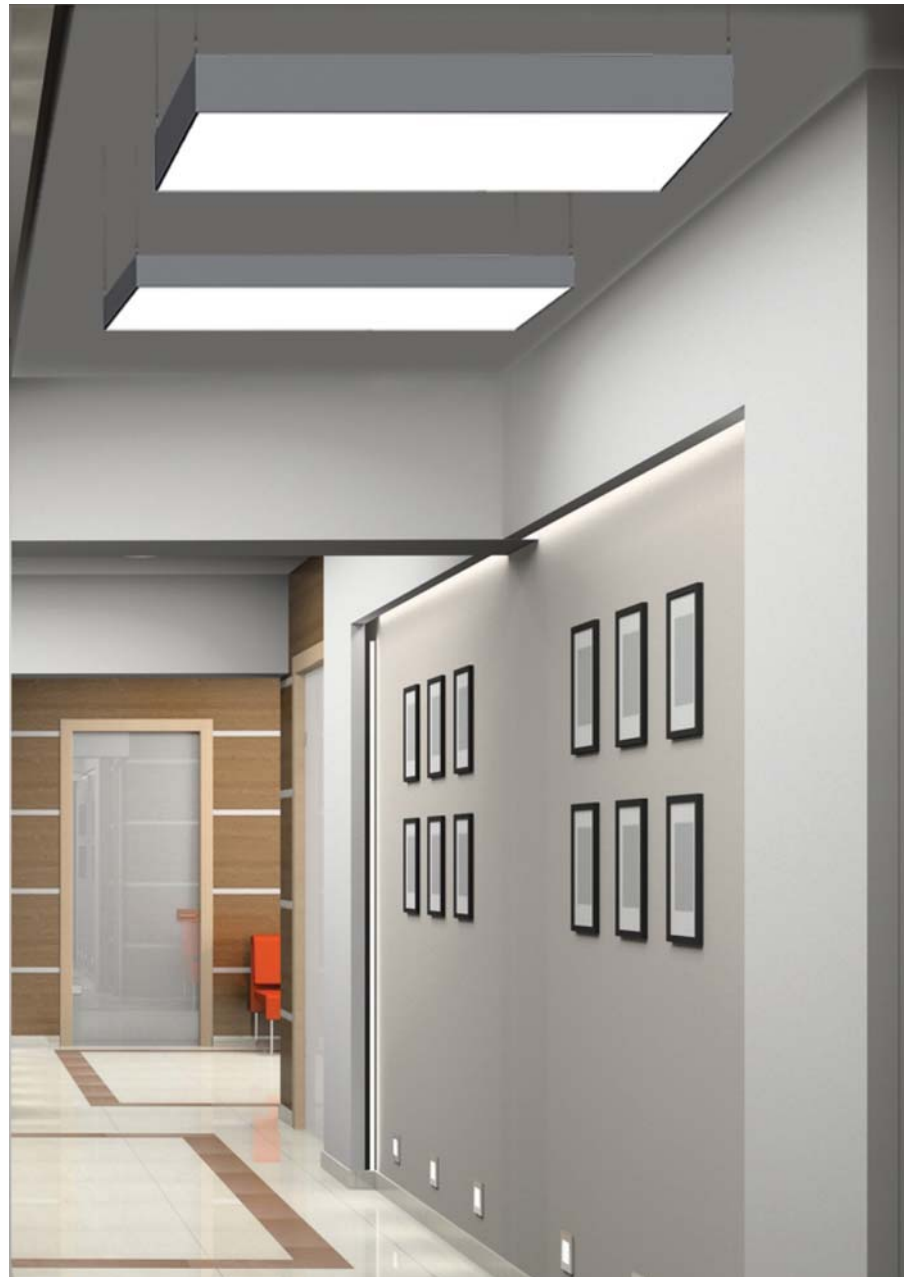

Showroom, Antalya