

- Min. 20 micron anodized aluminum extruded profile
- High efficient homogeneous light by plexiglas diffused cover
- Suitable for pendant/surface mounting
- Product length standards are; 90cm, 120cm, 150cm and 180cm
- Different sizes are applicable
- Different colors are applicable for the housing
- 1,5 m steel wire hangers are included
- The number of the hangers in the package may vary regarding the product size

P W Product & Power Options


Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Measurements (AxB) (mm)	Weight (kg)
QDRd6060	WW-NW-CW	24V DC	48	3.600	600x600	5,1
QDRd6060	WW-NW-CW	24V DC	72	5.400	600x600	5,1
QDRd9090	WW-NW-CW	24V DC	68	5.100	900x900	8,2
QDRd9090	WW-NW-CW	24V DC	100	7.500	900x900	8,2
QDRd120120	WW-NW-CW	24V DC	105	7.875	1200x1200	10,5
QDRd120120	WW-NW-CW	24V DC	160	12.000	1200x1200	10,5
QDRd150150	WW-NW-CW	24V DC	135	10.125	1500x1500	12,5
QDRd150150	WW-NW-CW	24V DC	200	15.000	1500x1500	12,5
QDRd180180	WW-NW-CW	24V DC	163	12.225	1800x1800	15,5
QDRd180180	WW-NW-CW	24V DC	245	18.375	1800x1800	15,5

*Power and Lumen values provided are based off of a cold white (CW) LED.

C Light Color Options

● WW: Warm White 3000K	● R: Red 625nm	● G: Green 525nm	● B: Blue 465nm	● A: Amber 590nm	● RGB
● NW: Natural White 4000K	● G: Green 525nm	● B: Blue 465nm	● A: Amber 590nm		● RGBW
● CW: Cold White 6500K	● B: Blue 465nm	● A: Amber 590nm			● RGBA

G Housing Color/Coating Options

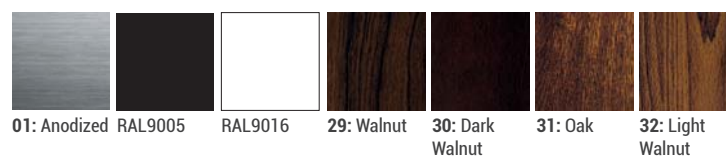

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW	●			●	●	
R,G,B,A	●			●	●	
RGB	●					
RGBA/W	●					
RGB DMX			●			
WHITE DMX			●			



Order Code

P . W . C . G

