

- Electrostatic powder coated aluminum body
- Tempered glass
- Stainless connectors
- One-way or two-way light output with different beam angle possibility

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Height (h) (mm)	Weight (kg)
SSA100-SINGLE	WW-NW-CW	220-240V AC	8	980	200	1,2
SSA100-DOUBLE	WW-NW-CW	220-240V AC	18	2.160	200	1,5
SSA100-DOUBLE	WW-NW-CW	220-240V AC	18	2.160	275	1,7

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

*Different colors are optional

S Driver Options

- 01 Standard Driver
- 06 DALI Driver

O Lens Options



N: Narrow Angle M: Medium Angle


Lower and upper direction light angles can be selected separately.

G Housing Color Options




Order Code

P . W . C . S . O . G



Product Diagrams

Polar Diagram

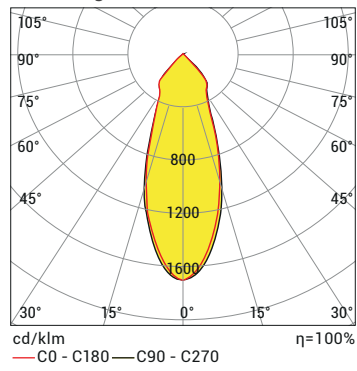






Conical Diagram

H (mt)	\emptyset (m)	E _{max} (lx)
0.5	0.36	7124
1.0	0.72	1793
1.5	1.08	797
2.0	1.44	448
2.5	1.80	287
3.0	2.16	199

SSA100-SINGLE WW30 40D 8W 220VAC IP65

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW 				•	•	
R,G,B,A 				•	•	
RGB 						
RGBA/W 						
RGB DMX 						
WHITE DMX 