

- Electrostatic powder coated aluminum injection housing
- 5° ultra narrow beam optics
- High cooling capacity body design
- 4mm tempered luminaire glass
- Aluminum injection side covers
- Stainless fittings and clips
- Electrostatic painted DKP / Galvanized mounting feet

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
WH220	WW-NW-CW	220-240V AC	130	11.544	13,0
WH220	WW-NW-CW	220-240V AC	180	13.892	13,0

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

S Driver Options


- 01 Standard Driver
- 06 DALI Driver

O Lens Options



XN: Extra Narrow Angle (5°)

G Housing Color Options



RAL9005 RAL9007 RAL9016

J Junction Options




01: Cable

02: IP Socket




Order Code

P . W . C . S . O . G . J




Product Diagrams

Polar Diagram

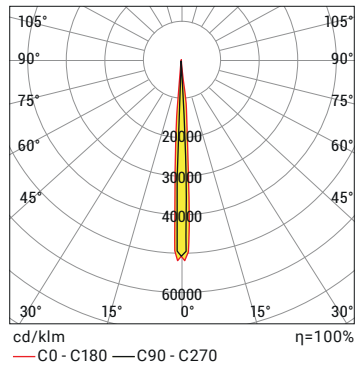

Conical Diagram

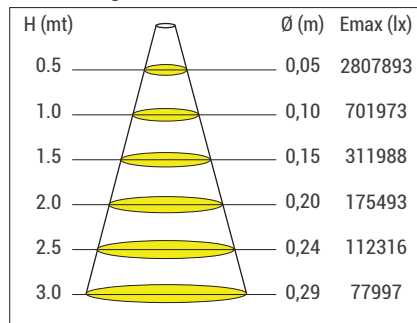

WH220 NW40 3D 180W 220VAC IP66

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				•		
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						