

- Electrostatic powder coated aluminum injection housing
- High cooling capacity body design
- 4mm tempered luminaire glass
- Aluminum injection side covers
- Stainless fittings and clips
- Electrostatic painted DKP / Galvanized mounting feet

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
WH2320	WW-NW-CW	220-240V AC	250	31.025	13,0
WH2320	WW-NW-CW	220-240V AC	300	40.635	13,0

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

*Different colors are optional

S Driver Options

- 01 Standard Driver
- 06 DALI Driver

O Lens Options



N: Narrow Angle M: Medium Angle W: Wide Angle XW: Without lens E: Elliptical Angle (60x120°)

G Housing Color Options



RAL9005 RAL9007 RAL9016

J Junction Options



01: Cable 02: IP Socket




Order Code

P . W . C . S . O . G . J



Product Diagrams

Polar Diagram

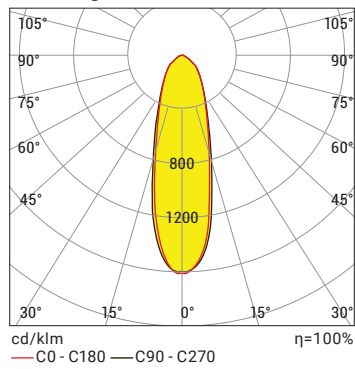

Conical Diagram

H (mt)	Ø (m)	E _{max} (lx)
0.5	0,28	238222
1.0	0,55	59555
1.5	0,83	26469
2.0	1,11	14889
2.5	1,39	9529
3.0	1,66	6617

WH1 ECO 144 CW 60D 150 W 220V AC

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				•	•	
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						



Mardan Palace Hotel, Antalya