

- Electrostatic powder coated aluminum injection housing
- High cooling capacity body design
- 5mm, tempered luminaire glass
- Stainless fittings and clips
- Electrostatic painted DKP / Galvanized mounting feet

## P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
WH6	WW-NW-CW	220-240V AC	60	10.291	4,1
WH6	WW-NW-CW	220-240V AC	70	11.428	4,1
WH6	WW-NW-CW	220-240V AC	80	12.214	4,1
WH6	WW-NW-CW	220-240V AC	90	13.309	4,1

\*Power and Lumen values provided are based off of a "cold white (CW) LED".

## C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

\*Different colors are optional

## S Driver Options

- 01 Standard Driver
- 06 DALI Driver

## O Lens Options



N: Narrow Angle    W: Wide Angle    XW: Without lens

## G Housing Color Options



RAL9005    RAL9007    RAL9016




Order Code

P . W . C . S . O . G




## Product Diagrams

Polar Diagram

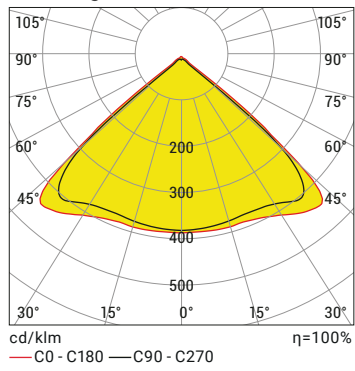

Conical Diagram

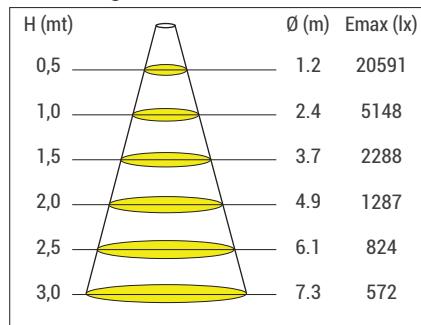

WH6 CW65 25D 60W 220VAC IP66

## Control System Options

	Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW					•	•	
R,G,B,A							
RGB							
RGBA/W							
RGB DMX							
WHITE DMX							