

- Electrostatic powder coated aluminum injection housing
- High cooling capacity body design
- 5mm tempered luminaire glass
- Aluminum injection side covers
- Stainless fittings and clips
- Electrostatic painted DKP / Galvanized mounting feet

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
WH6-POWER	WW-NW-CW	220-240V AC	60	7680	4,1
WH6-POWER	WW-NW-CW	220-240V AC	70	8750	4,1
WH6-POWER	WW-NW-CW	220-240V AC	80	9920	4,1
WH6-POWER	WW-NW-CW	220-240V AC	90	11700	4,1

*Power and Lumen values provided are based off of a "cold white (CW) LED".


C Light Color Options

● WW: Warm White	3000K	● R: Red	625nm
● NW: Natural White	4000K	● G: Green	525nm
● CW: Cold White	6500K	● B: Blue	465nm
		● A: Amber	590nm

S Driver Options

- 01 Standard Driver
- 06 DALI Driver
- 11 Driver + Emergency Lighting Kit 1h
- 12 Driver + Emergency Lighting Kit 3h

O Lens Options

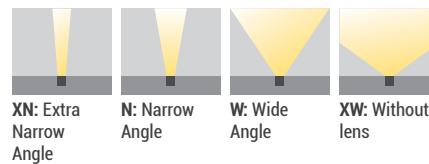


G Housing Color Options




Order Code

P . W . C . S . O . G




Product Diagrams

Polar Diagram

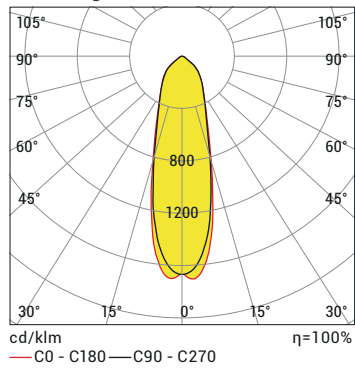

Conical Diagram

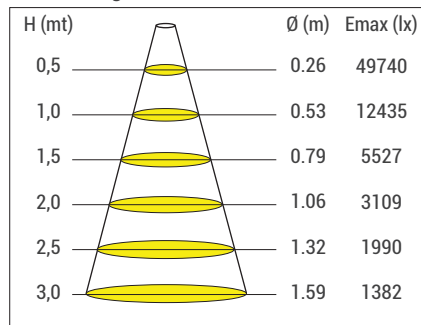

FIBERLI WH6 CW65 25D 60W 220VAC IP66

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				•	•	
R,G,B,A				•	•	
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						

Product Code	Voltage (V DC)	Control Systems	Cable Core Quantity		
			Mono	RGB	RGB W/A
WH6-POWER	24	PWM	2x	4x	-
	12-24	INV-PWM	-	-	6x