

- Min. 20 micron anodized aluminum extruded profile
- Anodized aluminum extruded fixture stand
- Polycarbonate luminaire glass
- PVC side covers with UV protection
- High efficiency group lens

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Length (L) (mm)	Weight (kg)
WLMS1	WW-NW-CW	24V DC	7,2	820	330	0,30
WLMS2	WW-NW-CW	24V DC	14,4	1.640	600	0,50
WLMS3	WW-NW-CW	24V DC	21,6	2.460	900	0,80
WLMS4	WW-NW-CW	24V DC	28,8	3.280	1200	1,10
WLMS50-DMX	RGB	24V DC	9	-	500	0,40
WLMS100-DMX	RGB	24V DC	17	-	1000	0,80


*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White 3000K	● R: Red 625nm
● NW: Natural White 4000K	● G: Green 525nm
● CW: Cold White 6500K	● B: Blue 465nm
● RGB	● A: Amber 590nm

Color alternatives are not available with DOB option.

O Lens Options

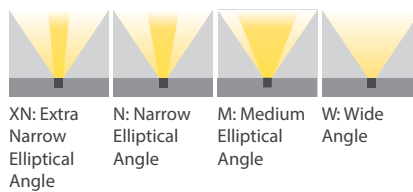


XN: Extra Narrow Elliptical Angle
N: Narrow Elliptical Angle
M: Medium Elliptical Angle
W: Wide Angle

J Junction Options



01: Cable
02: IP Socket


K Cable Direction Options*



01: Single entry
03: Dual entry and exit

*The max. junction qty may vary for the products with both entry and exit

M Mounting Options

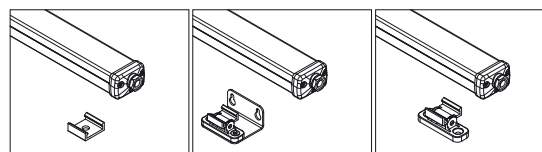


25: Surface Mounting
27: Wall Mounting
28: Floor Installation




Order Code

P . W . C . O . J . K . M



Product Diagrams

Polar Diagram

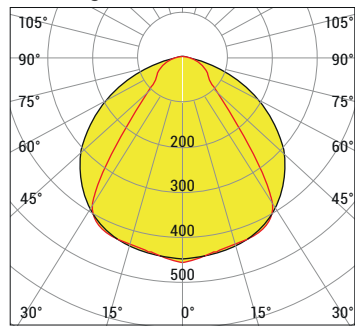


Conical Diagram

H (mt)	\emptyset (m)	E _{max} (lx)
0.5	0,77	1557
1.0	1,53	389
1.5	2,30	173
2.0	3,07	97
2.5	3,84	62
3.0	4,60	43

WLMS 1 MP12 CW 120D 8W 220V AC IP66

Polar Diagram

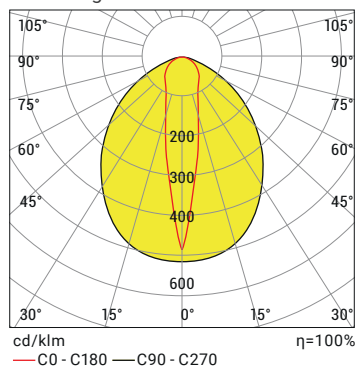

Conical Diagram

H (mt)	\emptyset (m)	E _{max} (lx)
0.5	0,17	7959
1.0	0,33	1990
1.5	0,50	884
2.0	0,66	497
2.5	0,83	318
3.0	0,99	221

WLMS 4 MP48 CW 10D 36W 220V AC IP66

Control System Options

Color Type	PWM	INV PWM	DMX	DALI *	0-10V DC*	TRIAC
WW-NW-CW	•			•	•	
R,G,B,A	•			•	•	
RGB	•					
RGBA/W						
RGB DMX			•			
WHITE DMX						

*Only for 24V DC

Product Code	Voltage (V DC)	Control Systems	Cores of Cables Count		
			Mono	RGB	RGB W/A
WLMS 109	24	PWM	2x	4x	-
WLMS 218	24	PWM	2x	4x	-
WLMS 327	24	PWM	2x	4x	-
WLMS 436	24	PWM	2x	4x	-

