

- Anodized aluminum extruded profile
- Stainless steel fixture stand
- Tempered luminaire glass
- UV protected PVC side covers with concealed outlet
- IP68 air vent

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Length (L) (mm)	Weight (kg)
WLT112	WW-NW-CW	220-240V AC	20	2.424	330	1,2
WLT224	WW-NW-CW	220-240V AC	35	4.335	625	2,0
WLT336	WW-NW-CW	220-240V AC	50	6.322	920	2,7
WLT448	WW-NW-CW	220-240V AC	65	8.023	1215	3,4
WLT112 DMX	RGB	220-240V AC	14	-	330	1,2
WLT224 DMX	RGB	220-240V AC	28	-	625	2,0
WLT336 DMX	RGB	220-240V AC	42	-	920	2,7
WLT448 DMX	RGB	220-240V AC	56	-	1215	3,4
WLT112 PDMX	RGB/W/A	220-240V AC	14	-	330	1,2
WLT224 PDMX	RGB/W/A	220-240V AC	28	-	625	2,0
WLT336 PDMX	RGB/W/A	220-240V AC	42	-	920	2,7
WLT448 PDMX	RGB/W/A	220-240V AC	56	-	1215	3,4
WLT112	RGB	15-24V DC	13,5	-	330	1,0
WLT224	RGB	15-24V DC	31	-	625	1,8
WLT336	RGB	15-24V DC	47	-	920	2,5
WLT448	RGB	15-24V DC	62	-	1215	3,0

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White 3000K	● R: Red 625nm	● RGB
● NW: Natural White 4000K	● G: Green 525nm	● RGBW
● CW: Cold White 6500K	● B: Blue 465nm	● RGBA
	● A: Amber 590nm	

*Different colors are optional

S Driver Options

- 01 Standard Driver
- 06 DALI Driver

O Lens Options




Order Code

P . W . C . S . O . J . K . U . M



Product Diagrams

Polar Diagram

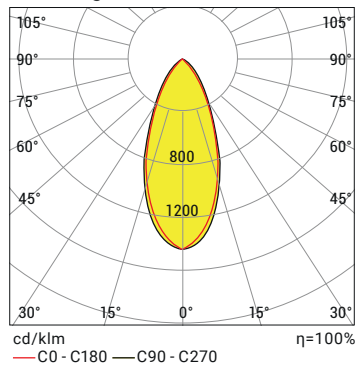


Conical Diagram

H (mt)	∅ (m)	E _{max} (lx)
0.5	0,22	33782
1.0	0,44	8446
1.5	0,65	3754
2.0	0,87	2111
2.5	1,09	1351
3.0	1,31	938

WLT224 CW65 60D 35W 220VAC IP66

Optional Accessories




- 34: Extension piece A=5cm
 - 35: Extension piece A=10cm
 - 36: Extension piece A=20cm
- Extension pieces at any desired length are optional*

J Junction Options




01: Cable 02: IP Socket

K Cable Direction Options




01: Single entry 03: Dual entry and exit

U Upper Cover Options



With Glare Shield Without Glare Shield

M Mounting Options

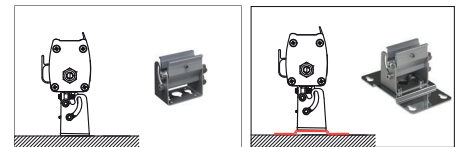

20: Standard Stand 21: Standard stand/ Mounting kit

Control System Options

Color Type	PWM	INV PWM	DMX	DALI *	0-10V DC*	TRIAC
WW-NW-CW	•		•	•	•	
R,G,B,A	•		•	•	•	
RGB*	•	•				
RGBA/W***		•				
RGB DMX			•			
WHITE DMX			•			

Product Code	Voltage (V DC)	Control Systems	Cable Core Quantity		
			Mono	RGB	RGB W/A
WLT112	15-24	INV-PWM	3x	5x	6x
	15-24	ON/OFF	2x	-	-
WLT224	15-24	INV-PWM	3x	5x	6x
	15-24	ON/OFF	2x	-	-
WLT336	15-24	INV-PWM	3x	5x	6x
	15-24	ON/OFF	2x	-	-
WLT448	15-24	INV-PWM	3x	5x	6x
	15-24	ON/OFF	2x	-	-



Irgandi, Bursa