

- Anodized aluminum extruded profile
- Stainless steel fixture stand
- Polycarbonate luminaire glass
- PC side covers with invisible gland outlet and UV protection.
- High efficiency group lens

## P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Length (L) (mm)	Weight (kg)
WS1-SMALL	WW-NW-CW	220-240V AC	25	3.068	210	1,8
WS2-SMALL	WW-NW-CW	220-240V AC	50	6.273	361	2,7
WS3-SMALL	WW-NW-CW	220-240V AC	75	9.821	515	3,6
WS4-SMALL	WW-NW-CW	220-240V AC	100	12.973	668	4,7

\*Power and Lumen values provided are based off of a lensless product with cold white (CW) LED.

## C Light Color Options


● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K
● A: Amber	590nm

\*Different colors are optional

## S Driver Options

- 01 Standard Driver
- 06 DALI Driver

## O Lens Options

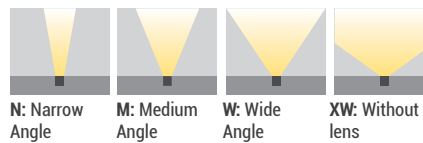

N: Narrow Angle    M: Medium Angle    W: Wide Angle    XW: Without lens

## G Housing Color Options



RAL9005    RAL9007    RAL9016

## J Junction Options




01: Cable    02: IP Socket




Order Code

P . W . C . S . O . G . J



## Product Diagrams

Polar Diagram

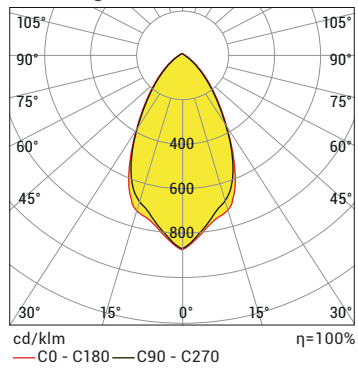

Conical Diagram

H (mt)	$\emptyset$ (m)	E <sub>max</sub> (lx)
0.5	0,56	9990
1.0	1,13	2497
1.5	1,69	1110
2.0	2,25	624
2.5	2,82	400
3.0	3,38	277

WSSM 72LED CW 60D 25W 220V AC IP66

## Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				•		
R,G,B,A				•		
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						

